



## Print and Apply System Hermes<sup>+</sup>

Made in Germany

*For current data,  
please refer to our website  
[www.cab.de/en/hermesplus](http://www.cab.de/en/hermesplus)*



*Scan the QR-code with your smartphone  
to get more information about the cab  
Print and Apply System Hermes+.*

# Contents

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| <b>Label printer Hermes+ . . . . .</b>                          | <b>4</b>       |
| <b>Overview types. . . . .</b>                                  | <b>4 - 5</b>   |
| <b>Technical details . . . . .</b>                              | <b>6</b>       |
| <b>Interfaces . . . . .</b>                                     | <b>7</b>       |
| <b>Technical data . . . . .</b>                                 | <b>8 - 9</b>   |
| <b>Applicators . . . . .</b>                                    | <b>10</b>      |
| <b>Overview applicators and transfer modules . . . . .</b>      | <b>11</b>      |
| <b>Product marking . . . . .</b>                                | <b>12</b>      |
| <b>Swing applicator 3214 . . . . .</b>                          | <b>12</b>      |
| <b>Stroke applicator 4114 . . . . .</b>                         | <b>13 - 14</b> |
| <b>Stroke-turn applicator 4214 . . . . .</b>                    | <b>15</b>      |
| <b>Stroke applicator 4414 . . . . .</b>                         | <b>16</b>      |
| <b>Swing-stroke applicator 4514 . . . . .</b>                   | <b>17</b>      |
| <b>Flag applicator 4714 . . . . .</b>                           | <b>18</b>      |
| <b>Package marking . . . . .</b>                                | <b>19</b>      |
| <b>Front-side applicator 3014 / 3016 . . . . .</b>              | <b>19</b>      |
| <b>Stroke applicator 4014 / 4016 . . . . .</b>                  | <b>20 - 21</b> |
| <b>Stroke-blow applicator 4614 . . . . .</b>                    | <b>22</b>      |
| <b>Demand module 5114 . . . . .</b>                             | <b>23</b>      |
| <b>Vacuum-belt applicator 5314 / 5316 . . . . .</b>             | <b>24</b>      |
| <b>Air-jet-box 6014 . . . . .</b>                               | <b>25</b>      |
| <b>Overview accessories . . . . .</b>                           | <b>26</b>      |
| <b>Accessories. . . . .</b>                                     | <b>27</b>      |
| <b>Accessories - Mounting aid . . . . .</b>                     | <b>28 - 29</b> |
| <b>Accessories - Floor stand . . . . .</b>                      | <b>30</b>      |
| <b>Software . . . . .</b>                                       | <b>31</b>      |
| <b>Software functions of the label printer. . . . .</b>         | <b>31</b>      |
| <b>Software-Tools - Label software and monitoring . . . . .</b> | <b>32</b>      |
| <b>Printer driver . . . . .</b>                                 | <b>33</b>      |
| <b>Delivery program . . . . .</b>                               | <b>34 - 37</b> |

# Overview types label printer Hermes+

Hermes+ is designed for automated print and apply processes in production lines. Different applicators allow the label to be applied via roll-on, blow-on or tamp-on to a product or packaging.



## The Sleek

For small labels with high printing accuracy.

| 1.1 Label printer      | Hermes+ 2 |     |
|------------------------|-----------|-----|
| Print resolution dpi   | 300       | 600 |
| Print width up to mm   | 54.2      | 57  |
| Print speed up to mm/s | 150       | 100 |
| Label roll Ø mm        | 205 / 305 |     |
| Label width up to mm   | 58        |     |



## The Universal

Our top-seller with high printing accuracy and an extensive range of accessories.

| 1.2 Label printer      | Hermes+ 4 |       |       |
|------------------------|-----------|-------|-------|
| Print resolution dpi   | 203       | 300   | 600   |
| Print width up to mm   | 104       | 105.6 | 105.6 |
| Print speed up to mm/s | 300       | 250   | 100   |
| Label roll Ø mm        | 205 / 305 |       |       |
| Label width up to mm   | 114       |       |       |



## The Wide

Ideal for Odette, UCC and GS1 labels.

| 1.3 Label printer      | Hermes+ 6 |       |
|------------------------|-----------|-------|
| Print resolution dpi   | 203       | 300   |
| Print width up to mm   | 168       | 162.6 |
| Print speed up to mm/s | 200       | 200   |
| Label roll Ø mm        | 205 / 305 |       |
| Label up to mm         | 174       |       |

# Overview types label printer Hermes+



Label reel Ø 205 mm



Label roll Ø 205 mm



Label roll Ø 305 mm



Dispensing direction to the left




Dispensing direction to the right



Cover protecting the device from dirt

# Technical details

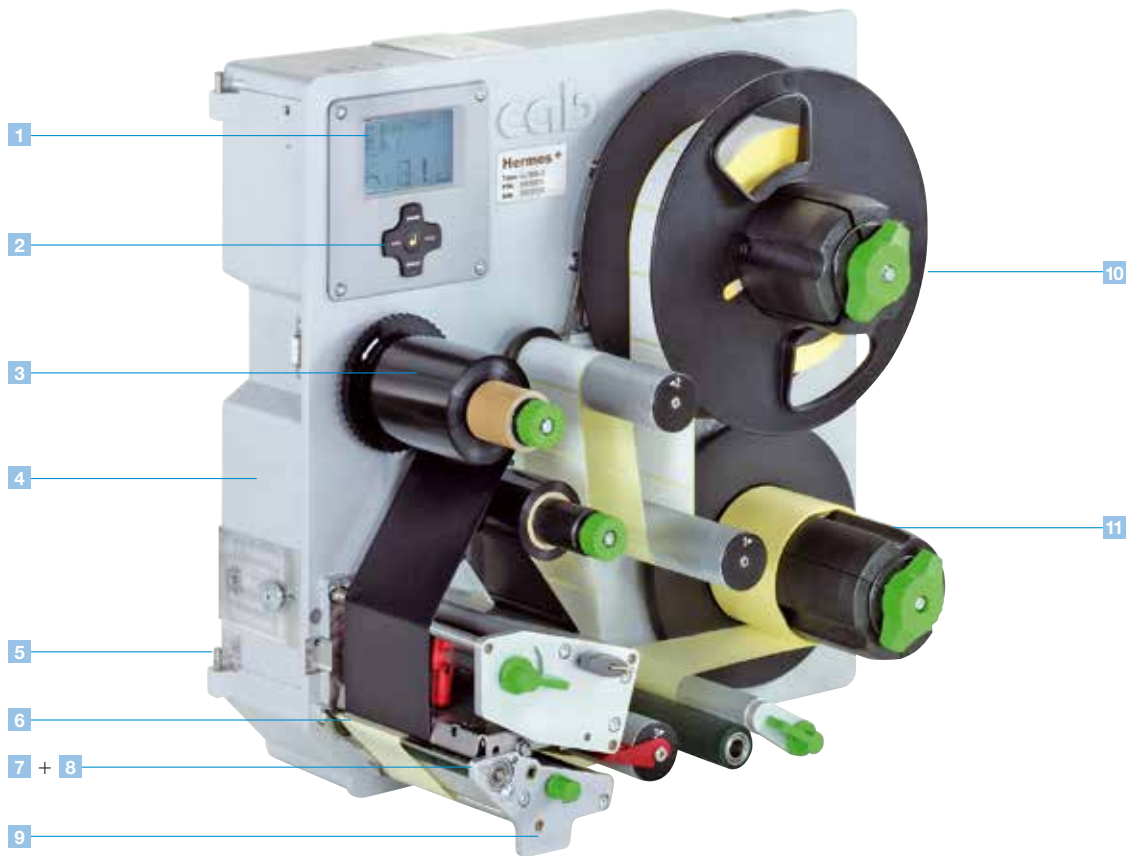

## 1 Large graphic display

White backlight for optimum readability.  
Depending on the installation position the display may be turned in steps of 90°.

## 2 Navigator pad

Simple, interactive menu control. The day and night design only displays applicable functions. Along with the graphic display menu navigation is made easy to understand.

## 3 Ribbon holder

Simple and centered insertion of the ribbon with the three-part tightening axes.

## 4 Solid metal chassis

Made of die-cast aluminum providing a basis for the assembly of all components.

## 5 Assembly applicator

The applicator is mounted on hinges and allows easy removal for maintenance.

## 6 Print positioning

After having exchanged the label roll the print position is automatically set after a few printed labels. The label position is kept, even if the machine is switched off.

## 7 Printhead

The printhead may be exchanged in just a few steps. And no need of doing adjustments and settings.

## 8 Ribbon saver

Is used for labels to be partially printed.  
The printhead is lifted within the unprinted area and the ribbon stopped during label feeding.

## 9 Transport system

The ball bearing mounted rollers for highly accurate print and precise label feeding.

## 10 Label unwinder

Swing lever and integrated brake make sure that the labels are unwound with constant tension.


## 11 Rewinder

The liner of a label roll is completely rewound after the labels have been peeled off. The three-part tightening axis enables an easy exchange of the roll.

## Print direction

All Hermes+ label printers with applicators are available with left and right print direction.

# All required interfaces

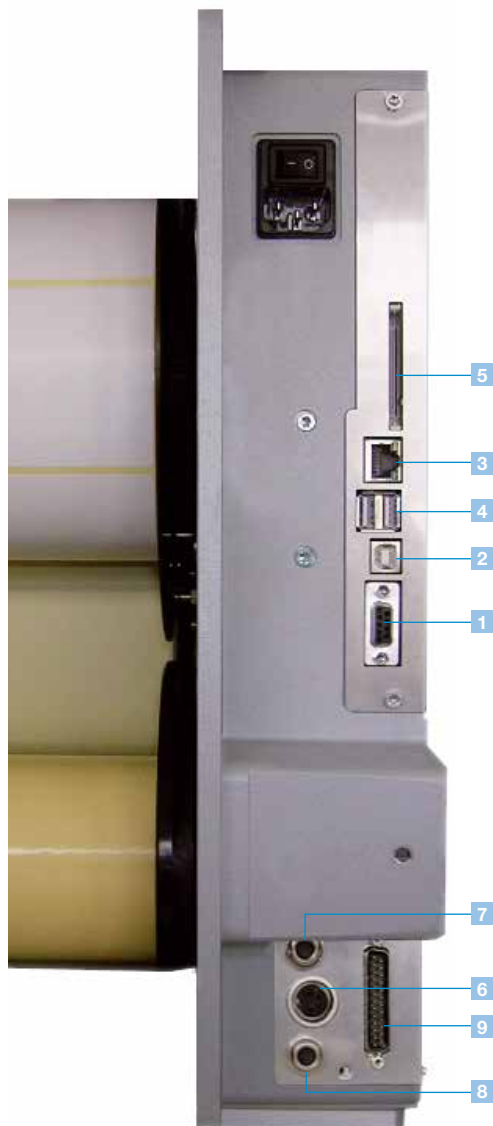

- 1 RS232C- interface
- 2 USB 2.0 Slave interface
- 3 Ethernet 10/100 Base T-interface with TCP/IP
- 4 Two USB-Master-interfaces for connection of an external operation panel, keyboard, scanner or service key
- 5 Slot for memory card CompactFlash Type I
- 6 Connection warning light  
Displays the printer status  
Green Device switched on  
Yellow Prewarning end of label, end of ribbon  
Red Error
- 7 Connection main valve for air pressure supply:  
For centrally switching the compressed air supply on/off
- 8 Connection external E-stop  
In connection with a main valve this interface allows to cut-off the compressed air supply in case of emergency
- 9 Digital I/O interface  
25-pin SUB-D connector  
All 24V in- and outputs are optically isolated

## Inputs

Start printing and applying  
Reprint  
Label feed  
Delete print job  
Pause  
Label dispensed  
Reset  
Stop printing and applying  
Print first label  
Label rotating 90°  
(Applicator 4214)

## Outputs

Ready to operate  
Print data available  
Paper feed on  
Prewarning end of ribbon  
Prewarning end of label  
Error end of ribbon  
Error end of label  
Label in dispensing position  
Basic position / upper end position  
Applying position / lower end position  
Common alarm

## Options



Interface Centronics bi-directional acc. to IEEE 1284.  
Interface RS422/RS485 1.200 up to 230.400 Baud/8 Bit.  
The interfaces are connected to the PC.  
Connection to the printer via USB connection cable.



Label selection box-I/O-box. Via PLC up to 16 different labels can be selected from the memory card. Control may also be to four in-/outputs via Basic Interpreter.

# Technical data

|                                                                                                                    |  |                     |  | 1.1                                                        |     | 1.2       |       | 1.3       |     |       |
|--------------------------------------------------------------------------------------------------------------------|--|---------------------|--|------------------------------------------------------------|-----|-----------|-------|-----------|-----|-------|
| Label printer                                                                                                      |  |                     |  | Hermes+ 2                                                  |     | Hermes+ 4 |       | Hermes+ 6 |     |       |
| Print head                                                                                                         |  |                     |  |                                                            |     |           |       |           |     |       |
| Print method                                                                                                       |  |                     |  | Thermal transfer/thermal direct                            |     |           |       |           |     |       |
| Print resolution                                                                                                   |  | dpi                 |  | 300                                                        | 600 | 203       | 300   | 600       | 203 | 300   |
| Print speed up to                                                                                                  |  | mm/s                |  | 150                                                        | 100 | 300       | 250   | 100       | 200 | 200   |
| Print width up to                                                                                                  |  | mm                  |  | 54.2                                                       | 57  | 104       | 105.6 | 105.6     | 168 | 162.6 |
| Material                                                                                                           |  |                     |  |                                                            |     |           |       |           |     |       |
| Labels on rolls or reel Hermes+ 2                                                                                  |  |                     |  | Paper, plastics such as PET, PE, PP, PVC, PU, acrylate, PI |     |           |       |           |     |       |
| Thickness mm/weight                                                                                                |  | g/m²                |  | 0,055–0,35/60–160                                          |     |           |       |           |     |       |
| Width labels¹)                                                                                                     |  | mm                  |  | 4–58                                                       |     | 10–114    |       | 50–174    |     |       |
| Width liner                                                                                                        |  | mm                  |  | 24–62                                                      |     | 24–118    |       | 54–178    |     |       |
|                                                                                                                    |  | roll                |  |                                                            |     |           |       |           |     |       |
|                                                                                                                    |  | reel                |  | 10–62                                                      |     | —         |       | —         |     |       |
| Label height¹) when dispensing                                                                                     |  | mm                  |  | 4–200                                                      |     | 8–320     |       | 25–320    |     |       |
| Media roll:                                                                                                        |  | Outside Ø           |  | up to mm                                                   |     | 205/305   |       |           |     |       |
|                                                                                                                    |  | Core Ø mm           |  | roll / adapter                                             |     | 40/50     |       | —         |     |       |
|                                                                                                                    |  |                     |  | roll                                                       |     | 76        |       | 76        |     |       |
|                                                                                                                    |  | Winding             |  | outside or inside                                          |     |           |       |           |     |       |
| Ribbon                                                                                                             |  |                     |  |                                                            |     |           |       |           |     |       |
| Ink                                                                                                                |  |                     |  | outside or inside                                          |     |           |       |           |     |       |
| Roll diameter                                                                                                      |  | up to mm            |  | 80                                                         |     | 80        |       | 80        |     |       |
| Core diameter                                                                                                      |  | mm                  |  | 25                                                         |     | 25        |       | 25        |     |       |
| Ribbon length variable                                                                                             |  | up to m             |  | 500                                                        |     | 500       |       | 500       |     |       |
| Width²)                                                                                                            |  | mm                  |  | 60                                                         |     | 114       |       | 165       |     |       |
| Ribbon saver                                                                                                       |  |                     |  | —                                                          |     | □         |       | □         |     |       |
| Internal rewinder                                                                                                  |  |                     |  |                                                            |     |           |       |           |     |       |
| Total diameter                                                                                                     |  | up to mm            |  | 155/210                                                    |     |           |       |           |     |       |
| Core diameter                                                                                                      |  | mm                  |  | 76                                                         |     | 76        |       | 76        |     |       |
| Dimensions printer                                                                                                 |  |                     |  |                                                            |     |           |       |           |     |       |
| Height mm                                                                                                          |  | Label roll Ø 205 mm |  | 400                                                        |     |           |       |           |     |       |
|                                                                                                                    |  | Label roll Ø 305 mm |  | 538                                                        |     |           |       |           |     |       |
| Depth mm                                                                                                           |  | Label roll Ø 205 mm |  | 400                                                        |     |           |       |           |     |       |
|                                                                                                                    |  | Label roll Ø 305 mm |  | 518                                                        |     |           |       |           |     |       |
| Width                                                                                                              |  | mm                  |  | 200                                                        |     | 255       |       | 315       |     |       |
| Weight                                                                                                             |  | kg                  |  | 15                                                         |     | 16        |       | 20        |     |       |
| Label sensor                                                                                                       |  |                     |  |                                                            |     |           |       |           |     |       |
| Gap sensor                                                                                                         |  |                     |  | for leading edge or punch marks and end of material        |     |           |       |           |     |       |
| Reflective sensor from the bottom or from the top                                                                  |  |                     |  | for print marks                                            |     |           |       |           |     |       |
| Distance to locating edge                                                                                          |  | mm                  |  | 2–26                                                       |     | 2–47      |       | 2–47      |     |       |
| Electronics                                                                                                        |  |                     |  |                                                            |     |           |       |           |     |       |
| Processor high speed 32 Bit Clock rate MHz                                                                         |  |                     |  | 266                                                        |     |           |       |           |     |       |
| RAM MB                                                                                                             |  |                     |  | 64                                                         |     |           |       |           |     |       |
| Memory IFFS MB Flash                                                                                               |  |                     |  | 8                                                          |     |           |       |           |     |       |
| Slot for CompactFlash Type I memory card                                                                           |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Battery buffer for real-time clock, printout of time and date, data storage on shut-down                           |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Warning signal: acoustic signal in case of error                                                                   |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Interfaces                                                                                                         |  |                     |  |                                                            |     |           |       |           |     |       |
| Centronics bi-directional acc. to IEEE 1284                                                                        |  |                     |  | □                                                          |     |           |       |           |     |       |
| RS232 C 1.200 up to 230.400 baud/8 bit                                                                             |  |                     |  | ■                                                          |     |           |       |           |     |       |
| USB 2.0 High Speed Slave for PC-connection                                                                         |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Ethernet 10/100 Base T, LPD, RawIP-Printing, ftp-Printing, DHCP, HTTP, FTP, SMTP, SNMP, TIME, Zeroconf, mDNS, SOAP |  |                     |  | ■                                                          |     |           |       |           |     |       |
| RS422, RS485 1.200 up to 230.400 Baud/8 bit                                                                        |  |                     |  | □                                                          |     |           |       |           |     |       |
| 2x USB Master for external operation panel, keyboard, scanner or service key                                       |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Connection warning light                                                                                           |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Digital I/O-interface                                                                                              |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Connection cab applicator                                                                                          |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Connection external emergency stop                                                                                 |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Main valve for air-pressure supply                                                                                 |  |                     |  | ■                                                          |     |           |       |           |     |       |
| Operating data                                                                                                     |  |                     |  |                                                            |     |           |       |           |     |       |
| Power supply                                                                                                       |  |                     |  | 100–240 VAC ~ 50/60 Hz, PFC                                |     |           |       |           |     |       |
| Power consumption                                                                                                  |  |                     |  | max. 300 W                                                 |     |           |       |           |     |       |
| Temperature / Humidity:                                                                                            |  | Operation:          |  | + 5 - 40°C / 10 - 85% not condensing                       |     |           |       |           |     |       |
|                                                                                                                    |  | Storage:            |  | + 0 - 60°C / 20 - 80% not condensing                       |     |           |       |           |     |       |
|                                                                                                                    |  | Transport:          |  | – 25 - 60°C / 20 - 80% not condensing                      |     |           |       |           |     |       |
| Approvals                                                                                                          |  |                     |  | CE, FCC class A, CB, CCC, UL                               |     |           |       |           |     |       |

<sup>1)</sup> The label size is in addition defined through the type of the applicator.

Limitations may apply to small labels, thin materials or strong adhesives. Critical applications need to be tested and approved.

<sup>2)</sup> The ribbon should roughly be the same width as the label in order to avoid folding.


# Technical data

■ Standard □ Option

| Operation panel       |                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Buttons / LED-display | Pause, Feed, Cancel, Menue, Enter, 4 x Cursor                                                                                                                                                                                                                                                                                    |
| LCD-graphic display   | Width 60, Height 40 mm, text 4 lines, about 20 characters per line                                                                                                                                                                                                                                                               |
| Settings              |                                                                                                                                                                                                                                                                                                                                  |
|                       | Time, date, digital or analog clock<br>25 language settings<br>system settings, print parameters, interfaces, security                                                                                                                                                                                                           |
| On the Display        |                                                                                                                                                                                                                                                                                                                                  |
|                       | <div> Data reception<br/>WLAN field intensity<br/>Ethernet state<br/>Use memory<br/>Temperature printhead<br/>Access to memory card </div> <div> Clock<br/>Date sheet<br/>abc debug<br/>Input buffer<br/>Remaining quantity of ribbon </div>                                                                                     |
| Monitoring            |                                                                                                                                                                                                                                                                                                                                  |
| Stop printing if:     | End of ribbon<br>End of labels<br>Printhead open                                                                                                                                                                                                                                                                                 |
| Warning if:           | End of ribbon<br>End of labels                                                                                                                                                                                                                                                                                                   |
| Test routines         |                                                                                                                                                                                                                                                                                                                                  |
| System diagnosis      | When switched on, including printhead testing                                                                                                                                                                                                                                                                                    |
| Short status.         | font list, device list, WLAN status, label profile, test                                                                                                                                                                                                                                                                         |
| Status print          | grid, monitor mode, PPP status                                                                                                                                                                                                                                                                                                   |
| Status reports        | Status printout with information about settings, e.g. print length counter, runtime counter, etc.<br>Request of status via software command.<br>Status messages on the display, e.g. network error - no link, barcode error, etc.                                                                                                |
| Fonts                 |                                                                                                                                                                                                                                                                                                                                  |
| Font types            | 5 Bitmap fonts incl. OCR-A, OCR-B and 3 Vector fonts Swiss 721, Swiss 721 Bold and Monospace 821 internally available, loadable TrueType fonts. Thai and Chinese (simplified Chinese) available as option.                                                                                                                       |
| Character sets        | Windows 1250 up to 1257, DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869, EBC DIC 500, ISO 8859-1 up to -10 and -13 up to -16, WinOEM 720, UTF-8, Macintosh Roman, DEC MCS, KOI8-R.<br>All West and East European Latin, Cyrillic, Greek, Hebrew and Arabic characters are supported. Thai and Chinese available as option. |
| Bitmap fonts          | Size of width and height 1-3 mm<br>Zoom 2-10<br>Orientation 0°, 90°, 180°, 270°                                                                                                                                                                                                                                                  |
| TrueType fonts        | Size of width and height 0.9 - 128 mm<br>Variable zoom,<br>Orientation 360° in steps of 1°                                                                                                                                                                                                                                       |
| Font formats          | Bold, italic, underlined, outline, inverse, depending on character fonts                                                                                                                                                                                                                                                         |
| Font width            | Variable                                                                                                                                                                                                                                                                                                                         |

| Graphics                            |                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Graphic elements                    | Line, arrow, box, circle, ellipse, filled and filled with fading                                                                                                                                                                                                                                                                                                               |                                                                                                                                              |
| Graphic formats                     | PCX, IMG, BMP, TIF, MAC, GIF, PNG                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                              |
| Barcodes                            |                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
| Linear barcodes                     | Code 39, Code 93<br>Code 39 Full ASCII<br>Code 128 A, B, C<br>EAN 8, 13<br>EAN / UCC 128<br>EAN / UPC Appendix 2<br>EAN / UPC Appendix 5<br>FIM<br>HIBC                                                                                                                                                                                                                        | Interleaved 2 / 5<br>Ident- and lead code of Deutsche Post AG<br>Codabar<br>JAN 8, 13<br>MSI<br>Plessey<br>Postnet<br>RSS 14<br>UPC A, E, E0 |
| 2D-Codes                            | Aztec, Codablock F, Data Matrix, PDF 417, Micro PDF 417, UPS Maxicode, QR-Code, RSS 14 truncated, limited, stacked und stacked omnidirectional, EAN-Datamatrix, GS1 Data Bar<br><br>All codes are variable in height, module width and ratio. Orientation 0°, 90°, 180°, 270°. Optionally with check digit, printed characters and start/stop code, depending on type of code. |                                                                                                                                              |
| Software                            |                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
| Programming                         | J-Script direct programming<br>abc-Basic Compiler<br>Database Connector                                                                                                                                                                                                                                                                                                        | ■<br>■<br>■                                                                                                                                  |
| System diagnosis/<br>administration | Printer monitoring<br>Network Manager                                                                                                                                                                                                                                                                                                                                          | ■<br>■                                                                                                                                       |
| Label software                      | cablabel® S3 Light<br>cablabel® S3 Viewer<br>cablabel® S3 Pro<br>cablabel® S3 Print                                                                                                                                                                                                                                                                                            | ■<br>■<br>□<br>□                                                                                                                             |
| Windows driver<br>certified         | 32/64 bit for<br>Windows XP<br>Windows Vista<br>Windows 7<br>Windows 8<br>Windows 8.1                                                                                                                                                                                                                                                                                          | Server 2003<br>Server 2008<br>Server 2008 R2<br>Server 2012<br>Server 2012 R2<br>■                                                           |
| Mac driver                          | OS X printer driver from version 10.6                                                                                                                                                                                                                                                                                                                                          | ■                                                                                                                                            |
| Linux driver                        | 32/64 Bit from CUPS 1.2                                                                                                                                                                                                                                                                                                                                                        | ■                                                                                                                                            |
| Stand-alone-<br>operation           |                                                                                                                                                                                                                                                                                                                                                                                | ■                                                                                                                                            |

# Applicators

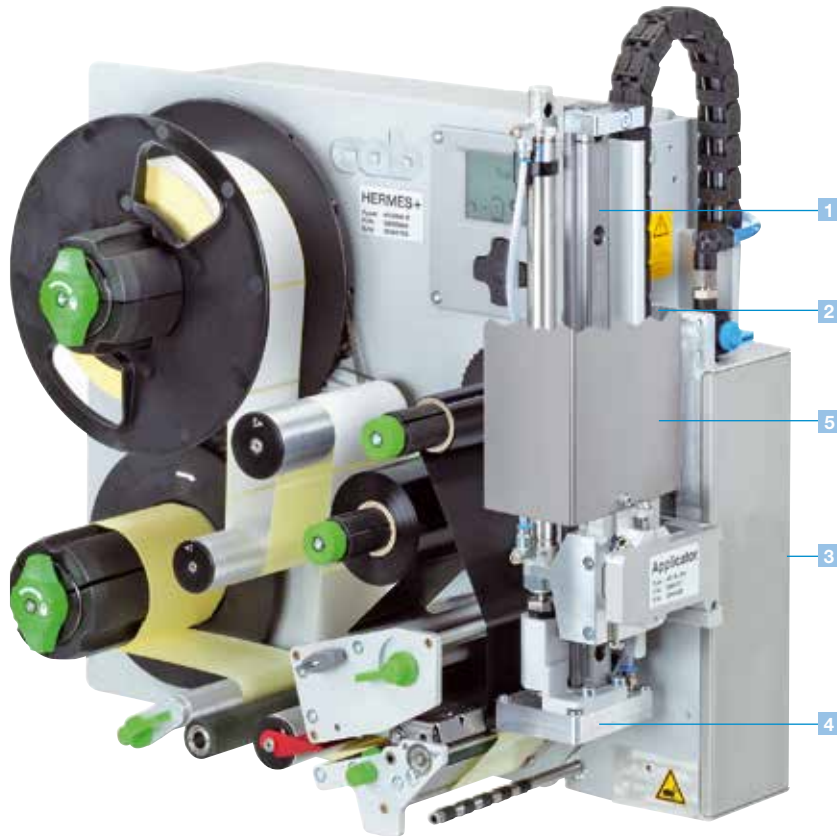

## 1 Long service life

The linear ball-bearing guides are precise and low-wearing.

## 2 Variable product heights

The lifting cylinder allows labeling at different heights. Standard stroke heights are available in 200 / 300 / 400 mm of length. Others are available on request.

## 3 High process reliability

Supporting air jet stream, suction air and lifting speed may be adjusted and are controlled via sensors.

## 4 Real time labeling

Applicators for small and big labels. Label with a height of 4–250 mm and a width of 4–174 mm can be applied.

## 5 Protective cover

As a standard, cylinder and guide are protected by a cover. For labeling work stations protective covers are available that are adapted to the product jig.

## 6 Pivot applicator

Easy and fast access to the printer's mechanics for material change or maintenance.

## Compressed air regulator

Reduces the pressure force of the lifting cylinder on the product.



# Overview applicators and transfer modules

|             |                         | Hermes+    |      |   | Transfer modules |    |    |    |    |    |    |    |    |    |   |   |    |                  |
|-------------|-------------------------|------------|------|---|------------------|----|----|----|----|----|----|----|----|----|---|---|----|------------------|
| Applicators |                         | 2          | 4    | 6 |                  |    |    |    |    |    |    |    |    |    |   |   |    |                  |
|             |                         | Order code |      |   | 11               | 11 | 12 | 61 | 21 | 88 | 31 | 31 | 41 | 51 | — | — | 90 |                  |
| 5.1         | Swing applicator        | 3214       |      |   | —                | F  | F  | F  | □  | —  | —  | —  | —  | —  | — | — | —  | Product labeling |
| 5.2         | Stroke applicator       | 4114       |      |   | —                | F  | F  | F  | □  | □  | —  | —  | —  | —  | — | — | —  |                  |
| 5.3         | Stroke-turn applicator  | 4214       |      |   | —                | F  | F  | F  | □  | —  | —  | —  | —  | —  | — | — | —  |                  |
| 5.4         | Stroke applicator       | 4414       |      |   | —                | F  | F  | F  | —  | —  | —  | —  | —  | —  | — | — | —  |                  |
| 5.5         | Swing-stroke applicator | 4514       |      |   | —                | —  | —  | —  | □  | —  | —  | —  | —  | —  | — | — | —  |                  |
| 5.6         | Flag applicator         |            | 4714 |   | —                | □  | —  | —  | —  | —  | —  | —  | —  | —  | — | — | —  |                  |

|      |                        |      |      |  |   |   |   |   |   |   |   |   |   |   |   |   |   |                       |
|------|------------------------|------|------|--|---|---|---|---|---|---|---|---|---|---|---|---|---|-----------------------|
| 5.7  | Front-side applicator  | 3014 |      |  | — | □ | — | — | □ | — | — | □ | — | — | — | — | — | Labeling of packaging |
|      |                        |      | 3016 |  | — | □ | — | — | — | — | — | □ | — | — | — | — | — |                       |
| 5.8  | Stroke applicator      | 4014 |      |  | □ | F | — | — | □ | — | □ | □ | □ | — | — | — | — |                       |
|      |                        |      | 4016 |  | — | □ | — | — | — | — | — | □ | □ | — | — | — | — |                       |
| 5.9  | Stroke-blow applicator | 4614 |      |  | — | — | — | — | □ | — | — | — | — | — | — | — | — |                       |
| 5.10 | Demand module          | 5114 |      |  | — | — | — | — | — | — | — | — | — | — | □ | — | — |                       |
| 5.11 | Vacuum-belt applicator | 5314 | 5316 |  | — | — | — | — | — | — | — | — | — | — | — | □ | — | Labeling of packaging |
| 5.12 | Air-jet box            | 6014 |      |  | — | — | — | — | — | — | — | — | — | — | — | — | □ |                       |

## Type code applicator

|                   |              |           |  |  |
|-------------------|--------------|-----------|--|--|
|                   |              | 4414L-200 |  |  |
| Type              |              | 441       |  |  |
| for label printer | Hermes+2     | 2         |  |  |
|                   | Hermes+4     | 4         |  |  |
|                   | Hermes+6     | 6         |  |  |
| Label direction   | to the left  | L         |  |  |
|                   | to the right | R         |  |  |
| Cylinder stroke   |              | 200       |  |  |
|                   |              | 300       |  |  |
|                   |              | 400       |  |  |

**F** Immersion depth of pad in mm\*

\*Allows the immersion of the tamp pad into the surface of the label.

# Product marking

## Swing applicator 3214

5.1



For precise real-time labeling of very small to medium sized labels. Preferred method is to apply the labels from the side. The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. A rotating cylinder turns to the labeling position. The label is positioned onto the product via stroke cylinder. Pivoting angle and linear stroke are adjustable.



### Tamp pad

Labels are precisely applied on flat, even recessed surfaces.



### Tamp pad with damping pad

The damping pad is used to reduce noise produced by hard surfaces and is specially suitable for surfaces with rough structure or slightly uneven.


### Tamp pad with label stop

For applying small labels the label stop ensures a very precise positioning onto the product.



### Blow pad

For pressure-sensitive surfaces or products in motion. The labels are applied via air jet onto the product. The distance of 5-10mm to the product surface is set with a stop at the stroke cylinder.



| Technical data                        |                               |     | Tamp pad      | Tamp pad with damping pad | Tamp pad with label stop | Blow pad      |
|---------------------------------------|-------------------------------|-----|---------------|---------------------------|--------------------------|---------------|
|                                       |                               |     | 3214 L/R 11 F | 3214 L/R 12 F             | 3214 L/R 61 F            | 3214 L/R 2100 |
| Label width                           | Hermes+2                      | mm  | 4–58          | 10–58                     | 10–58                    | 10–58         |
|                                       | Hermes+4                      | mm  | 10–114        | 10–114                    | 10–114                   | 10–80         |
| Label height                          | Hermes+2                      | mm  | 5–80          | 8–80                      | 5–80                     | 10–80         |
|                                       | Hermes+4                      | mm  | 8–80          | 8–80                      | 8–80                     | 10–80         |
| Product                               | not in motion during labeling |     | ■             | ■                         | ■                        | ■             |
|                                       | in motion during labeling     |     | –             | –                         | –                        | ■             |
| Labeling onto the product             | from the side                 |     | ■             | ■                         | ■                        | ■             |
| Product height                        | fixed                         |     | ■             | ■                         | ■                        | ■             |
| Distance of product to peel-off plate |                               | mm  | 250–280       | 250–280                   | 250–280                  | 250–280       |
| Horizontal linear guides              |                               | mm  | 5–30          | 5–30                      | 5–30                     | 5–30          |
| Pivoting angle                        |                               |     | 45°–95°       | 45°–95°                   | 45°–95°                  | 45°–95°       |
| Immersion depth pad F                 | up to                         | mm  | 30            | 30                        | 30                       | –             |
| Air pressure supply                   |                               | bar | 4,5           | 4,5                       | 4,5                      | 4,5           |
| Cycle time <sup>1)</sup>              | approx. cycles/min.           |     | 20            | 20                        | 20                       | 20            |

<sup>1)</sup> Calculated at label height 40 mm, print speed 100 mm/s

# Product marking

## Stroke applicator 4114

5.2



### Tamp pad

Labels are precisely applied on flat, even recessed surfaces.



### Tamp pad with damping pad

The damping pad is used to reduce noise produced by hard surfaces and is specially suitable for surfaces with rough structure or slightly uneven.



### Tamp pad with label stop

For applying small labels the label stop ensures a very precise positioning onto the product.

### Blow pad

For pressure-sensitive surfaces or products in motion. The labels are applied via air jet onto the product. The distance of 5-10mm to the product surface is set with a stop at the stroke cylinder.



For precise real-time labeling of very small to medium sized labels. Labels may be applied on the product from all sides. The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. A short stroke cylinder moves the label horizontally to the labeling position and places the label on the product. The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.

| Technical data                                    |                               |          | Tamp pad      | Tamp pad with damping pad | Tamp pad with label stop | Blow pad      |
|---------------------------------------------------|-------------------------------|----------|---------------|---------------------------|--------------------------|---------------|
|                                                   |                               |          | 4114 L/R 11 F | 4114 L/R 12 F             | 4114 L/R 61 F            | 4114 L/R 2100 |
| Label width                                       | Hermes+2                      | mm       | 4–58          | 10–58                     | 10–58                    | 10–58         |
|                                                   | Hermes+4                      | mm       | 10–114        | 10–114                    | 10–114                   | 10–114        |
| Label height                                      | Hermes+2                      | mm       | 4–80          | 8–80                      | 4–80                     | 10–80         |
|                                                   | Hermes+4                      | mm       | 8–80          | 8–80                      | 8–80                     | 10–80         |
| Product                                           | not in motion during labeling |          | ■             | ■                         | ■                        | ■             |
|                                                   | in motion during labeling     |          | –             | –                         | –                        | ■             |
| Labeling onto the product                         | from top                      |          | ■             | ■                         | ■                        | ■             |
|                                                   | from below                    |          | ■             | ■                         | ■                        | ■             |
|                                                   | from the side                 |          | ■             | ■                         | ■                        | ■             |
| Product height                                    | fixed                         |          | –             | –                         | –                        | ■             |
|                                                   | variable                      |          | ■             | ■                         | ■                        | –             |
| Horizontal short stroke cylinder                  | mm                            |          | 10            | 10                        | 10                       | 10            |
| Product distance to lower edge at cylinder stroke | 200                           | up to mm | 135           | 135                       | 135                      | 140           |
|                                                   | 300                           | up to mm | 235           | 235                       | 235                      | 240           |
|                                                   | 400                           | up to mm | 335           | 335                       | 335                      | 340           |
| Immersion depth pad F <sup>2)</sup>               | up to mm                      |          | 100           | 100                       | 100                      | –             |
| Air pressure supply                               | bar                           |          | 4,5           | 4,5                       | 4,5                      | 4,5           |
| Cycle time <sup>1)</sup>                          | l approx. cycles/min.         |          | 30            | 30                        | 30                       | 30            |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

<sup>2)</sup> If immersion depth at applicator > 25 mm, the cover of the Hermes+ has to be modified.

# Product marking

## Stroke applicator 4114


5.2



For precise real-time labeling of very small to medium sized labels. Labels may be applied on the product from all sides. The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. A short stroke cylinder turns the tamp pad horizontally into the labeling position and places the label onto the product. The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.

### Silicone form pad

Labels are precisely applied on cylindrical bodies, curved and inclined surfaces. Curved silicone form pads are used to avoid blistering on very smooth and flat surfaces. Cylindrical bodies may be wrapped up to 200°.



| Technical data                   |                               |                     | Silicone form pad<br>4114 L/R 8800 |
|----------------------------------|-------------------------------|---------------------|------------------------------------|
| Label width                      | Hermes+2                      | mm                  | 10–58                              |
|                                  | Hermes+4                      | mm                  | 10–114                             |
| Label height                     |                               | mm                  | 8–80                               |
| Product                          | not in motion during labeling |                     | ■                                  |
|                                  | in motion during labeling     |                     | –                                  |
| Labeling onto the product        | from top                      |                     | ■                                  |
|                                  | from below                    |                     | ■                                  |
|                                  | from the side                 |                     | ■                                  |
| Product height                   | variable                      |                     | ■                                  |
| Horizontal short stroke cylinder |                               | mm                  | 10                                 |
| Product distance to lower edge   |                               |                     |                                    |
| at cylinder stroke               | 200                           | up to mm            | 135                                |
|                                  | 300                           | up to mm            | 235                                |
|                                  | 400                           | up to mm            | 335                                |
| Air pressure supply              |                               | bar                 | 4,5                                |
| Cycle time <sup>1)</sup>         |                               | approx. cycles/min. | 20                                 |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 40 mm, print speed 100 mm/s  
If height of silicone form pad > 25 mm, the cover of the Hermes+ has to be modified.

# Product marking

## Stroke-turn applicator 4214

5.3



For precise real-time labeling of very small to medium sized labels in case of difficult installation positions. Labels may be applied on the product from all sides.

The pad is positioned in front of the peel-off plate.

The label is held by the applicator during the printing process.

A rotating cylinder turns the label horizontally and up to 180°

into the labeling position and places the label on the product.

The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.



### Tamp pad

Labels are precisely applied on flat, even recessed surfaces.



### Tamp pad with damping pad

The damping pad is used to reduce noise produced by hard surfaces and is specially suitable for surfaces with rough structure or slightly uneven.



### Tamp pad with label stop

For applying small labels the label stop ensures a very precise positioning onto the product.



### Blow pad

For pressure-sensitive surfaces or products in motion. Labels are applied via air jet onto the product. The distance of 5-10mm to the product surface is set with a stop at the stroke cylinder.

| Technical data                                    |                               |             | Tamp pad      | Tamp pad with damping pad | Tamp pad with label stop | Blow pad      |
|---------------------------------------------------|-------------------------------|-------------|---------------|---------------------------|--------------------------|---------------|
|                                                   |                               |             | 4214 L/R 11 F | 4214 L/R 12 F             | 4212 L/R 61 F            | 4214 L/R 2100 |
| Label width                                       | Hermes+2                      | mm          | 4–58          | 10–58                     | 10–58                    | 10–58         |
|                                                   | Hermes+4                      | mm          | 10–80         | 10–80                     | 10–80                    | 10–80         |
| Label height                                      | Hermes+2                      | mm          | 4–40          | 8–40                      | 4–40                     | 10–40         |
|                                                   | Hermes+4                      | mm          | 8–40          | 8–40                      | 8–40                     | 10–40         |
| Product                                           | not in motion during labeling |             | ■             | ■                         | ■                        | ■             |
|                                                   | in motion during labeling     |             | –             | –                         | –                        | ■             |
| Labeling onto the product                         | from top                      |             | ■             | ■                         | ■                        | ■             |
|                                                   | from below                    |             | ■             | ■                         | ■                        | ■             |
|                                                   | from the side                 |             | ■             | ■                         | ■                        | ■             |
| Product height                                    | fixed                         |             | –             | –                         | –                        | ■             |
|                                                   | variable                      |             | ■             | ■                         | ■                        | –             |
| Horizontal pivoting angle                         | 90°, 180°, 0°                 |             | ■             | ■                         | ■                        | ■             |
| Product distance to lower edge at cylinder stroke | 200                           | up to mm    | 135           | 135                       | 135                      | 140           |
|                                                   | 300                           | up to mm    | 235           | 235                       | 235                      | 240           |
|                                                   | 400                           | up to mm    | 335           | 335                       | 335                      | 340           |
| Immersion depth pad F <sup>2)</sup>               | up to                         | mm          | 65            | 65                        | 65                       | –             |
| Air pressure supply                               |                               | bar         | 4,5           | 4,5                       | 4,5                      | 4,5           |
| Cycle time <sup>1)</sup>                          | approx.                       | cycles/min. | 20            | 20                        | 20                       | 20            |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

<sup>2)</sup> If immersion depth at applicator > 25 mm the cover of the Hermes+ has to be modified.

# Product marking

## Stroke applicator 4414

5.4



For precise real-time labeling of very small to medium sized labels. Final positioning onto the product is adjustable in X- and Y direction. Labels may be applied on the product from all sides. The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. Two short stroke cylinders move the pad horizontally into the labeling position and place the label on the product. The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.



### Tamp pad

Labels are precisely applied on flat, even recessed surfaces.



### Tamp pad with damping pad

The damping pad is used to reduce noise produced by hard surfaces and is specially suitable for surfaces with rough structure or slightly uneven.

### Tamp pad with label stop

For applying small labels the label stop ensures a very precise positioning onto the product.



| Technical data                                       |                               |          | Tamp pad      | Tamp pad<br>with damping pad | Tamp pad<br>with label stop |
|------------------------------------------------------|-------------------------------|----------|---------------|------------------------------|-----------------------------|
|                                                      |                               |          | 4414 L/R 11 F | 4414 L/R 12 F                | 4414 L/R 61 F               |
| Label width                                          | Hermes+2                      | mm       | 4–58          | 10–58                        | 10–58                       |
|                                                      | Hermes+4                      | mm       | 10–114        | 10–114                       | 10–114                      |
| Label height                                         | Hermes+2                      | mm       | 4–80          | 8–80                         | 4–80                        |
|                                                      | Hermes+4                      | mm       | 8–80          | 8–80                         | 8–80                        |
| Product                                              | not in motion during labeling |          | ■             | ■                            | ■                           |
| Labeling onto the product                            | from top                      |          | ■             | ■                            | ■                           |
|                                                      | from below                    |          | ■             | ■                            | ■                           |
|                                                      | from the side                 |          | ■             | ■                            | ■                           |
| Product height                                       | variable                      |          | ■             | ■                            | ■                           |
| Horizontal short stroke cylinder                     | x-direction                   |          | 3–7           | 3–7                          | 3–7                         |
|                                                      | y-direction                   |          | 11–15         | 11–15                        | 11–15                       |
| Product distance to lower edge<br>at cylinder stroke | 200                           | up to mm | 135           | 135                          | 135                         |
|                                                      | 300                           | up to mm | 235           | 235                          | 235                         |
|                                                      | 400                           | up to mm | 335           | 335                          | 335                         |
| Immersion depth pad F <sup>2)</sup>                  | up to mm                      |          | 90            | 90                           | 90                          |
| Air pressure supply                                  | bar                           |          | 4,5           | 4,5                          | 4,5                         |
| Cycle time <sup>1)</sup>                             | approx. cycles/min.           |          | 25            | 25                           | 25                          |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

<sup>2)</sup> If immersion depth at applicator > 25 mm, the cover of the Hermes+ has to be modified

# Product marking

## Swing-stroke applicator 4514

5.5



### Blow pad

Labels are blown onto the product via air jet with a distance of 5 – 10 mm to the product surface.

For precise real-time labeling at the inner surface of profiles and pipes. Precise position of the label is adjusted with a stop at the stroke cylinder. Labels may be applied on the product from all sides. The blow pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. A rotating cylinder turns the pad into the labeling level. The stroke cylinder moves the label into the labeling position.



| Technical data                                                    |                               |          | Blow pad          |
|-------------------------------------------------------------------|-------------------------------|----------|-------------------|
|                                                                   |                               |          | 4514 L/R 2100     |
| Label width                                                       | Hermes+2                      | mm       | 10–58             |
|                                                                   | Hermes+4                      | mm       | 10–80             |
| Label height                                                      |                               | mm       | 10–60             |
| Product                                                           | not in motion during labeling |          | ■                 |
| Labeling onto the product                                         | from top                      |          | ■                 |
|                                                                   | from below                    |          | ■                 |
|                                                                   | from the side                 |          | ■                 |
| Product height                                                    |                               | fixed    | ■                 |
| Vertical pivoting angle                                           |                               |          | 120°              |
| Distance lower edge device to upper edge label at cylinder stroke | 200                           | up to mm | 150 <sup>2)</sup> |
|                                                                   | 300                           | up to mm | 250 <sup>2)</sup> |
|                                                                   | 400                           | up to mm | 350 <sup>2)</sup> |
| Air pressure supply                                               |                               | bar      | 4,5               |
| Cycle time <sup>1)</sup>                                          | approx. cycles/min.           |          | 20                |



<sup>1)</sup> Calculated at stroke 100 mm below device, label height 40 mm, print speed 100 mm/s

<sup>2)</sup> Depending on label height

# Product marking

## Flag applicator 4714

5.6

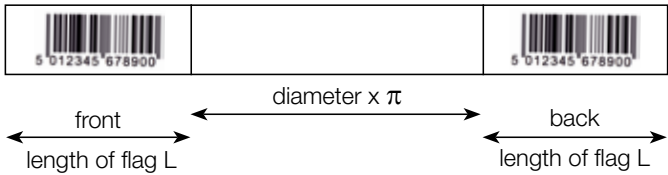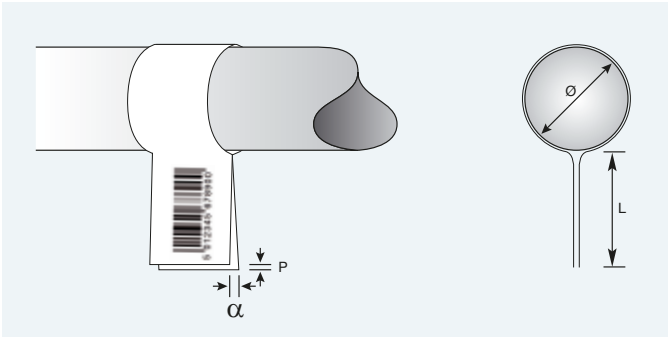

For precise real-time labeling on round materials such as cables, tubes, pipes, etc. Labels may be applied on the product from all sides. The tamp pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. A stroke cylinder moves the label to the labeling position. Another cylinder moves the label around the round body via cam control. In doing so the label is first precisely glued together at its ends and then pressed onto the round body. The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.




| Technical data                                                   |                               | 4714 L/R                        |
|------------------------------------------------------------------|-------------------------------|---------------------------------|
| Label width                                                      | Hermes+4 mm                   | 100 – 114 (on request 60 – 100) |
| Label height                                                     | mm                            | 10 – 50                         |
| Diameter                                                         | mm                            | 3 – 20                          |
| Product                                                          | not in motion during labeling | ■                               |
| Labeling onto the product                                        | from top                      | ■                               |
|                                                                  | from below                    | ■                               |
|                                                                  | from the side                 | ■                               |
| Product height                                                   | fixed                         | ■                               |
| Product distance to lower edge at cylinder stroke 300 min. 70 mm | up to mm                      | 260                             |
| Immersion depth tongs                                            | mm                            | 55                              |
| Offset P                                                         | mm                            | 0,5 – 1,0                       |
| Air pressure supply                                              | bar                           | 4,5                             |
| Cycle time <sup>1)</sup>                                         | approx. cylces/min.           | 15                              |

<sup>1)</sup>Print speed 100 mm/s

# Packaging marking

## Front-side applicator 3014 / 3016

5.7

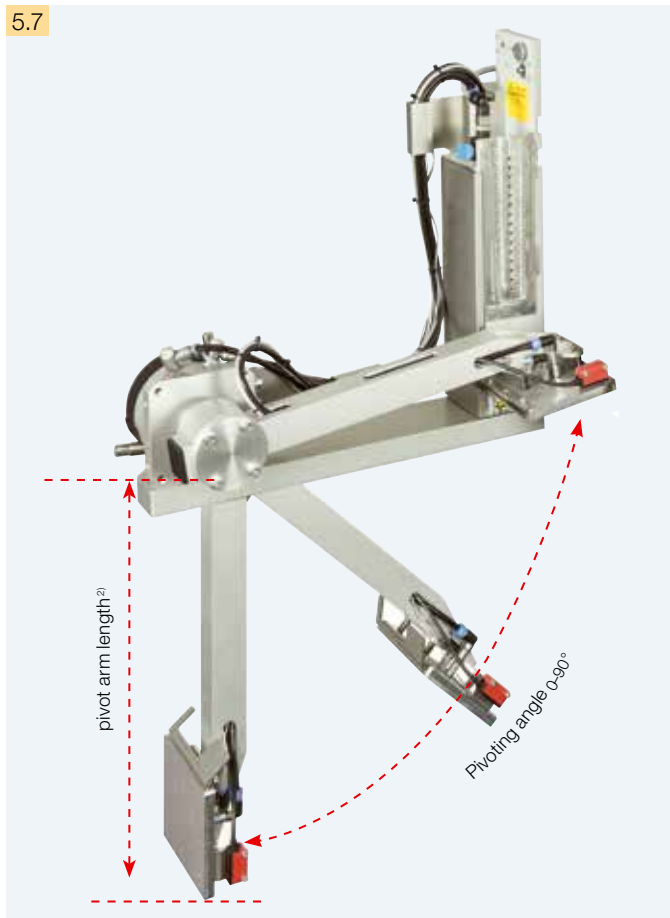

For real-time labeling on packaging in motion. Preferred method is to apply the labels on the front or back of the product. Labeling from above or from the side is possible. The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process.

Labels are applied on the product via rotating cylinder. A sensor enables the detection of the packaging and to control the pivot arm and tamp pad moving to their initial position after labeling.



### Tamp pad

Labels are precisely applied on flat, even recessed surfaces.



### Spring-mounted tamp pad

The spring-mounted suction plate enables labeling on inclined surfaces up to 15°. Vertical deviation can be up to 10 mm within the label area.



### Blow pad

Labels are blown onto the product via air jet with a distance of 5 – 10 mm to the product surface.



| Technical data                 |                               |    | Tamp pad         | Spring-mounted tamp pad | Blow pad      |
|--------------------------------|-------------------------------|----|------------------|-------------------------|---------------|
|                                |                               |    | 3014/16 L/R 1100 | 3014/16 L/R 3100        | 3014 L/R 2100 |
| Label width                    | Hermes+4                      | mm | 25–114           | 80–114                  | 25–114        |
|                                | Hermes+6                      | mm | 25–174           | 80–174                  | –             |
| Label height                   | Hermes+4                      | mm | 8–250            | 80–250                  | 10–100        |
|                                | Hermes+6                      | mm | 25–250           | 80–250                  | 25–100        |
| Product                        | not in motion during labeling |    | ■                | ■                       | ■             |
|                                | in motion during labeling     |    | ■                | ■                       | ■             |
| Labelling onto the product     | from top                      |    | ■                | ■                       | ■             |
|                                | from the side                 |    | ■                | ■                       | ■             |
|                                | from the front                |    | ■                | ■                       | ■             |
|                                | from the back                 |    | ■                | ■                       | ■             |
| Product height                 | variable                      |    | ■                | ■                       | ■             |
| Pivot arm length <sup>1)</sup> | mm                            |    | 200/300/400      | 200/300/400             | 200/300/400   |
| Pivoting angle                 |                               |    | 0–90°            | 0–90°                   | 0–90°         |
| Air pressure supply            | bar                           |    | 4,5              | 4,5                     | 4,5           |
| Cycle time <sup>1)</sup>       | approx. cycles/min.           |    | 15               | 15                      | 15            |

<sup>1)</sup> Calculated at length pivot arm length 200 mm, label height 40 mm / print speed 100 mm/s

<sup>2)</sup> Pivot arm length is defined as achievable label position under 90° (lower edge label format) measured from the base area of Hermes+

# Packaging marking

## Stroke applicator 4014 / 4016

5.8



For real-time labeling on packaging or products. According to the type of pad the product is either in or not in motion. Labels may be applied from all sides.

The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process.

The stroke cylinder places the label onto the product. A sensor enables to detect the product and to control the tamp pad moving to its initial position after labeling. The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.



### Tamp pad

Labels are precisely applied on flat, even recessed surfaces.



### Universal pad

Labels are applied onto even surfaces. The vacuum holes providing suction to the labels are pilot holes placed in a distance of 5 mm and covered with sliding film. These are opened according to the label size using a punching tool. Two spare sliding films are included in the scope of delivery.



### Spring-mounted tamp pad

The spring-mounted vacuum plate enables labeling on curved surfaces up to 15°. Vertical deviation may be up to 10 mm within the label area.



### Spring-mounted universal pad

The spring-mounted vacuum plate enables labeling on curved surfaces up to 15°. Vertical deviation may be up to 10mm within the label area. The vacuum holes providing suction to the labels are pilot holes placed in a distance of 5 mm and covered with sliding film. Two spare sliding films are included in the scope of delivery.



| Technical data                                    |                               |          | Tamp pad         | Universal pad | Spring-mounted tamp pad | Spring-mounted universal pad |
|---------------------------------------------------|-------------------------------|----------|------------------|---------------|-------------------------|------------------------------|
|                                                   |                               |          | 4014/16 L/R 11 F | 4014 L/R 1100 | 4014/16 L/R 3100        | 4014 L/R 3100                |
| Label width                                       | Hermes+4                      | mm       | 20–114           | 75 / 90       | 80–114                  | 116 / 116                    |
|                                                   | Hermes+6                      | mm       | 50–174           | –             | 80–174                  | –                            |
| Label height                                      | Hermes+4                      | mm       | 20–210           | 60 / 90       | 80–210                  | 102 / 152                    |
|                                                   | Hermes+6                      | mm       | 25–210           | –             | 80–210                  | –                            |
| Product                                           | not in motion during labeling |          | ■                | ■             | ■                       | ■                            |
| Labeling onto the product                         | from top                      |          | ■                | ■             | ■                       | ■                            |
|                                                   | from below                    |          | ■                | ■             | ■                       | ■                            |
|                                                   | from the side                 |          | ■                | ■             | ■                       | ■                            |
| Product height                                    | variable                      |          | ■                | ■             | ■                       | ■                            |
| Product distance to lower edge at cylinder stroke | 200                           | up to mm | 135              | 135           | 130                     | 130                          |
|                                                   | 300                           | up to mm | 235              | 235           | 230                     | 230                          |
|                                                   | 400                           | up to mm | 335              | 335           | 330                     | 330                          |
| Immersion depth pad F <sup>2)</sup>               | up to mm                      |          | 120              | –             | –                       | –                            |
| Air pressure supply                               | bar                           |          | 4,5              | 4,5           | 4,5                     | 4,5                          |
| Cycle time <sup>1)</sup>                          | approx. cycles/min.           |          | 25               | 25            | 25                      | 25                           |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 100 mm, print speed 100 mm/s

<sup>2)</sup> If immersion depth at applicator > 25 mm, the cover of the Hermes+ has to be modified

# Packaging marking

## Stroke applicator 4014 / 4016

5.8



### Blow pad

For pressure-sensitive surfaces or products in motion. Labels are applied via air jet onto the product. The distance of 5-10mm to the product surface is set with a stop at the stroke cylinder.



### Roll-on pad

Labels are rolled on flat product surfaces during their transport.



### Corner-wrap pad

Labels are applied on two adjacent product sides. The tamp pad applies the first half on top side of the product and then the second half of the label is rolled on.

For real-time labeling on packaging or products. According to the type of pad the product is either in or not in motion.

Labels may be applied from all sides.

The pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process.

The stroke cylinder places the label onto the product. A sensor enables to detect the product and to control the tamp pad moving to its initial position after labeling.

The length of the stroke cylinder defines the maximum distance from the peel-off plate to the product.



| Technical data                                    |                               |                     | Blow pad      | Roll-on pad      | Corner-wrap pad |
|---------------------------------------------------|-------------------------------|---------------------|---------------|------------------|-----------------|
|                                                   |                               |                     | 4014 L/R 2100 | 4014/16 L/R 4100 | 4014 L/R 5100   |
| Label width                                       | Hermes+4                      | mm                  | 20–114        | 25–114           | 20–114          |
|                                                   | Hermes+6                      | mm                  | –             | 50–174           | –               |
| Label height                                      | Hermes+4                      | mm                  | 20–100        | 80–250           | 60–210          |
|                                                   | Hermes+6                      | mm                  | –             | 80–250           | –               |
| Product                                           | not in motion during labeling |                     | ■             | –                | ■               |
|                                                   | in motion during labeling     |                     | ■             | ■                | –               |
| Labeling onto the product                         | from top                      |                     | ■             | ■                | ■               |
|                                                   | from below                    |                     | ■             | ■                | –               |
|                                                   | from the side                 |                     | ■             | ■                | –               |
| Product height                                    | fixed                         |                     | ■             | –                | –               |
|                                                   | variable                      |                     | –             | ■                | ■               |
| Product distance to lower edge at cylinder stroke | 200                           | up to mm            | 140           | 160              | 100             |
|                                                   | 300                           | up to mm            | 240           | 260              | 200             |
|                                                   | 400                           | up to mm            | 340           | 360              | 300             |
| Air pressure supply                               |                               | bar                 | 4,5           | 4,5              | 4,5             |
| Cycle time <sup>1)</sup>                          |                               | approx. cycles/min. | 25            | 20               | 20              |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 100 mm, print speed 100 mm/s

# Packaging marking

## Stroke-blow applicator 4614

5.9



### Blow pad

Labels are blown onto the product via air jet with a distance of 5 – 10 mm to the product surface.

For real-time labeling of packaging differing in height and being in motion. Labels may be applied from all sides. The blow pad is positioned in front of the peel-off plate. The label is held by the applicator during the printing process. The stroke cylinder moves the tamp pad controlled via sensor about 10 mm above the product. The length of the stroke cylinder defines the maximum differences in height of the packaging.



| Technical data                                    |                               |                     | Blow pad      |
|---------------------------------------------------|-------------------------------|---------------------|---------------|
|                                                   |                               |                     | 4614 L/R 2100 |
| Label width                                       | Hermes+4                      | mm                  | 20 – 114      |
|                                                   | Hermes+6                      | mm                  | on request    |
| Label height                                      | Hermes+4                      | mm                  | 20 – 100      |
|                                                   | Hermes+6                      | mm                  | on request    |
| Product                                           | not in motion during labeling |                     | ■             |
|                                                   | in motion during labeling     |                     | ■             |
| Labeling onto the product                         | from top                      |                     | ■             |
|                                                   | from below                    |                     | ■             |
|                                                   | from the side                 |                     | ■             |
| Product height                                    | fixed                         |                     | ■             |
|                                                   | variable                      |                     | ■             |
| Product distance to lower edge at cylinder stroke | 200                           | up to mm            | 140           |
|                                                   | 300                           | up to mm            | 240           |
|                                                   | 400                           | up to mm            | 340           |
| Air pressure supply                               |                               | bar                 | 4,5           |
| Cycle time <sup>1)</sup>                          |                               | approx. cycles/min. | 25            |

<sup>1)</sup> Calculated at stroke 100 mm below device, label height 100 mm, print speed 100 mm/s


# Packaging marking

## Demand module 5114

5.10



For serial labeling of packaging in motion. The variable guide pulley enables to adjust the label position at the dispensing tongue. Labels may be applied from all sides. Printing and labeling is done simultaneously. Speed of the conveyor belt needs to be adapted to the print speed.

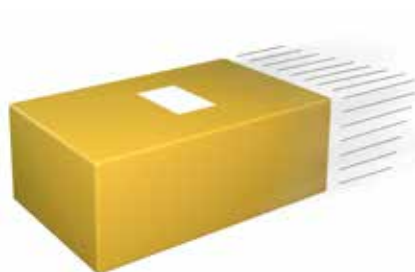


| Technical data                 |                           | Demand module 5114                                               |
|--------------------------------|---------------------------|------------------------------------------------------------------|
| Label width                    | Hermes+4 mm               | 25 – 114                                                         |
| Label height                   | mm                        | 25 – 250                                                         |
| Product                        | in motion during labeling | ■                                                                |
| Labeling onto the product      | from top                  | ■                                                                |
|                                | from below                | ■                                                                |
|                                | from the side             | ■                                                                |
| Product height                 | fixed                     | ■                                                                |
| Product distance to lower edge | mm                        | 80                                                               |
| Product speed                  | mm/s                      | needs to correspond to the print speed / 50 – 250 in steps of 25 |
| Cycle time <sup>1)</sup>       | approx. cycles/min.       | 60                                                               |

<sup>1)</sup> Label height 100 mm, print speed 100 mm/s

# Packaging marking

## Vacuum belt applicator 5314 / 5316

5.11

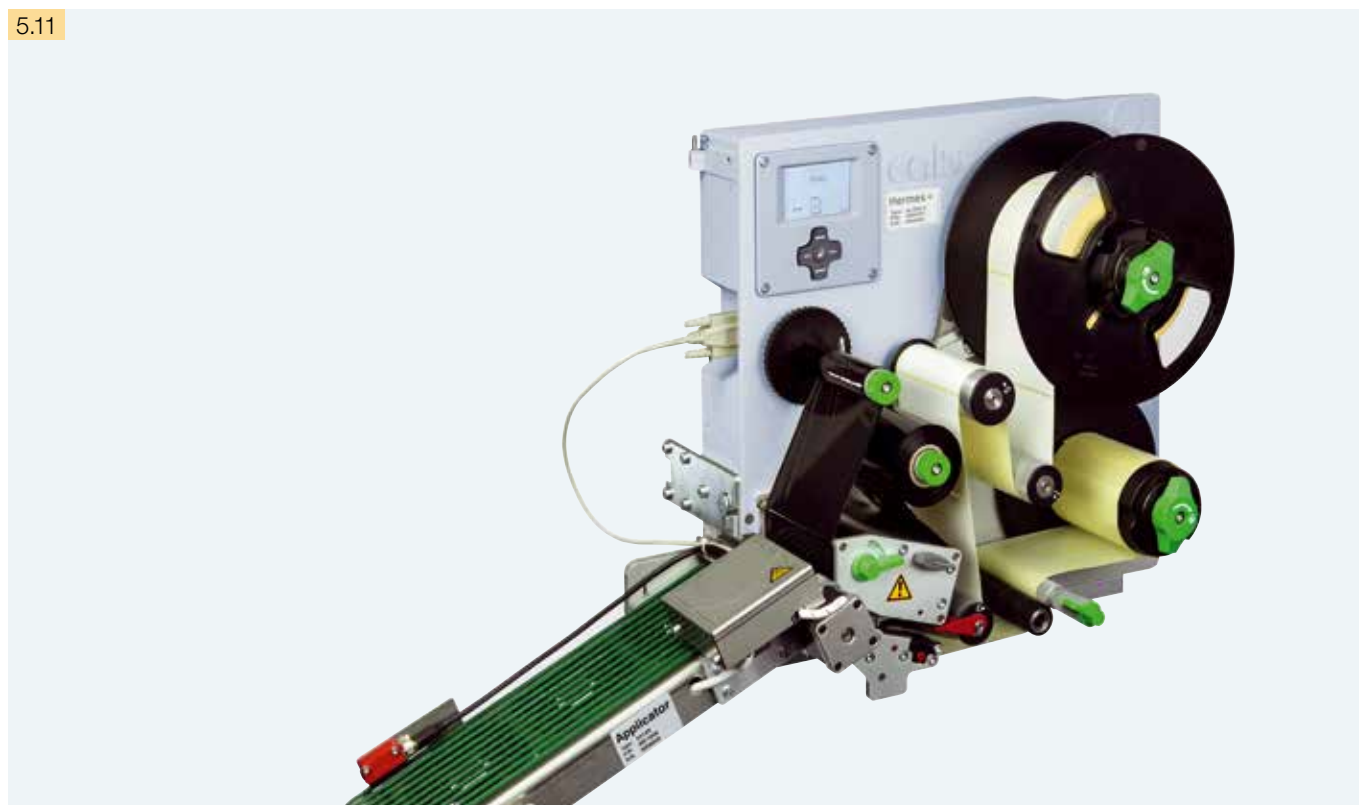

For real-time labeling of packaging in motion. The printed label is moved into the labeling position via vacuum belt and applied on the packaging via external signal. Labels may be applied from all sides. Printing and labeling may be done simultaneously. The conveyor speed is not related to the print speed.



| Technical data                    |               |                     | Vacuum belt applicator 5314 | Vacuum belt applicator 5316 |
|-----------------------------------|---------------|---------------------|-----------------------------|-----------------------------|
| Label width                       | Hermes+4      | mm                  | 20–114                      | –                           |
|                                   | Hermes+6      | mm                  | –                           | 50–174                      |
| Label height                      |               | mm                  | 70–320                      |                             |
| Product in motion during labeling |               |                     | ■                           |                             |
| Labeling onto the product         | from top      |                     | ■                           |                             |
|                                   | from below    |                     | ■                           |                             |
|                                   | from the side |                     | ■                           |                             |
| Product distance                  |               | fixed               | ■                           |                             |
| Speed vacuum belt <sup>2)</sup>   |               | mm/s                | 100 / 150 / 220 / 300       |                             |
| Length vacuum belt                |               | mm                  | 390                         |                             |
| Cycle time <sup>1)</sup>          |               | approx. cvcles/min. | 30                          |                             |

<sup>1)</sup> Label height 100 mm, print speed 100 mm/s

# Packaging marking

## Air-jet-box 6014

5.12



For fast real-time labeling of packaging or products in motion. Preferred method is to apply the labels from top. Labels are sucked with a fan and blown off by nozzels via powerful air jet. Distance from lower edge of the device to the product is, according to the label size, up to 100 mm.

### Air-jet module

Pre-drilled holes provide suction and blow capabilities. The blow tubes are aligned on the pad based on the label size. The outer area around the label is covered with film. The blow box pad may be easily exchanged for different label sizes.



| Technical data                 |                               |     | Air-jet module 6014 L/R 9000 |  |
|--------------------------------|-------------------------------|-----|------------------------------|--|
| Label width                    | Hermes+4                      | mm  | 50–114                       |  |
| Label height                   |                               | mm  | 50–150                       |  |
| Product                        | not in motion during labeling |     | ■                            |  |
|                                | in motion during labeling     |     | ■                            |  |
| Labeling onto the product      | from top                      |     | ■                            |  |
|                                | from the side                 |     | ■                            |  |
| Product height                 | variable                      |     | ■                            |  |
| Product distance to lower edge |                               | mm  | 10–100                       |  |
| Air pressure                   |                               | bar | 4,5                          |  |
| Cycle time <sup>1)</sup>       | approx. cycles/min.           |     | 60                           |  |

<sup>1)</sup> Calculated at label height 80 mm

# Overview accessories

■ Standard □ Option

| Extras Hermes+   |                                                                        | Hermes+2 | Hermes+4 | Hermes+6 |
|------------------|------------------------------------------------------------------------|----------|----------|----------|
| 2.1              | Cover (only for label rolls up to 205 mm Ø)                            | □        | □        | □        |
| 2.2              | External operation panel                                               | □        | □        | □        |
| 2.3              | Standard keyboard USB                                                  | □        | □        | □        |
| 2.4              | Memory card CompactFlash Type I                                        | □        | □        | □        |
| 2.5              | Photo sensor to start 25 pole connection Hermes+                       | □        | □        | □        |
| 2.6              | Photo sensor to start 3 pole connection circular connector air-jet box |          |          |          |
| 2.7              | I/O Interface connector SUB-D-plug 25 pole                             | □        | □        | □        |
| 2.8              | Warning light                                                          | □        | □        | □        |
| 2.9              | Circular connector 3-pin/4-pin M8                                      | □        | □        | □        |
| Interfaces       |                                                                        |          |          |          |
| 3.1              | Centronics bi-directional acc. to IEEE 1284                            | □        | □        | □        |
| 3.2              | RS232 C 1.200 up to 230.400 baud/8 bit                                 | □        | □        | □        |
| 3.3              | Label selection – I/O-box                                              | □        | □        | □        |
| Connecting cable |                                                                        |          |          |          |
| 4.1              | Connecting cable RS232 C, 9/9-pin, length 3 m                          | □        | □        | □        |
| 4.2              | Patch cable CAT 5e, length 3 m, grey                                   | □        | □        | □        |

| Extras applicators | Type                                             | 30 | 32 | 40 | 41 | 42 | 44 | 45 | 46 | 47 | 60 |
|--------------------|--------------------------------------------------|----|----|----|----|----|----|----|----|----|----|
| 5.13               | Blow tube cpl.                                   | □  | □  | □  | □  | □  | □  | □  | □  | □  | □  |
| 5.14               | Air pressure regulation unit                     | □  | □  | □  | □  | □  | □  | □  | □  | □  | □  |
| 5.15               | Air pressure regulation unit with main valve     | □  | □  | □  | □  | □  | □  | □  | □  | □  | □  |
| 5.16               | Air pressure regulation unit with shut-off valve | □  | □  | □  | □  | □  | □  | □  | □  | □  | □  |
| 5.17               | Compressed air regulator                         | —  | □  | □  | □  | □  | □  | —  | —  | □  | —  |

| Assembly aids |                                             | Hermes+2 | Hermes+4 | Hermes+6 |
|---------------|---------------------------------------------|----------|----------|----------|
| 6.1           | Adapter plate                               | □        | □        | □        |
| 6.2           | Profile 40 / 80 / 120 mm                    | □        | □        | □        |
| 6.3           | Base plate 500 x 255                        | □        | □        | —        |
| 6.4           | Mounting plate                              | □        | □        | □        |
| 6.5           | Bracket                                     | □        | □        | □        |
| 6.6           | Clamped joint                               | □        | □        | □        |
| 6.7           | Flanged joint                               | □        | □        | □        |
| 6.8           | Stand 1601                                  | □        | □        | □        |
| 6.9           | Stand 1602                                  | □        | □        | □        |
| Software      |                                             |          |          |          |
| 7.1           | J-Script direct programming                 | ■        | ■        | ■        |
| 7.2           | Replace files and integration in SAP R/3    | ■        | ■        | ■        |
| 7.3           | abc-Basic-Compiler                          | ■        | ■        | ■        |
| 7.4           | Printer monitoring with Intra- and Internet | ■        | ■        | ■        |
| 7.5           | Database Connector                          | ■        | ■        | ■        |
|               | Label software cablabel® S3 Lite            | ■        | ■        | ■        |
| 7.6           | Label software cablabel® S3 Pro             | □        | □        | □        |
|               | Label software cablabel® S3 Print           | □        | □        | □        |
| 7.7           | Administration Network Manager              | ■        | ■        | ■        |
| 7.8           | Printer driver Windows                      | ■        | ■        | ■        |
| 7.9           | Printer driver Apple-MAC/Linux              | ■        | ■        | ■        |
| 7.10          | Programmer's guide                          | ■        | ■        | ■        |

# Accessories

| Extras Hermes+                                                                             | Product                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.1<br>   | <b>Cover</b><br>Protecting the Hermes+ from dirt and against accidental contact. If the immersion depth of the applicator exceeds 25mm the cover has to be modified. The cover is approved for the vertical installation position.                                                                                                                                |
| 2.2<br>   | <b>External operation panel</b><br>If the operation panel is not accessible after installation of the printer an external operation panel may additionally be connected. There is also a slot for CF Card Type 1 and USB host interface.                                                                                                                          |
| 2.3<br>   | <b>Standard keyboard USB</b><br>Connection: USB, number of keys: 115                                                                                                                                                                                                                                                                                              |
| 2.4<br>  | <b>Memory card</b><br>CompactFlash Typ I. Storing label formats, fonts, texts<br>Graphics are read- and writeable either on the printer or on the PC                                                                                                                                                                                                              |
| 2.5<br> | <b>Product sensor to start 25 pin</b><br>Connection Hermes+.<br>Start of printing and applying after detection of a product, e.g. on a conveyor belt.                                                                                                                                                                                                             |
| 2.6<br> | <b>Product sensor 3 pin</b><br>Connection applicator.<br>Start of printing and applying after detection of a product, e.g. on a conveyor belt.                                                                                                                                                                                                                    |
| 2.7<br> | <b>Interface connector Sub-D plug</b><br>With screw terminals for connecting all control signals at the IO-interface Hermes+                                                                                                                                                                                                                                      |
| 2.8<br> | <b>Warning light</b><br>Indicates the display and additionally the printer status.<br><b>Red:</b> Printing or applying error<br><b>Yellow:</b> Prewarning end of label, end of ribbon<br><b>Green:</b> Ready for operation<br>The warning light is mounted directly at the printer, bracket or somewhere in the surrounding area. Length of connection cable 1 m. |
| 2.9<br> | <b>Circular connector</b><br>3-pin M8 / 4-pin M8                                                                                                                                                                                                                                                                                                                  |

| Interfaces                                                                               | Product                                                                                                     |
|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| 3.1<br> | <b>Interface Centronics</b><br>bi-directional acc. to IEEE 1284                                             |
| 3.2<br> | <b>Interface RS422/RS485</b><br>1.200 up to 230.400 baud/8 bit                                              |
| 3.3<br> | <b>Label selection – I/O-Box</b><br>Via PLC up to 16 different labels can be selected from the memory card. |
| Connecting cable                                                                         | Product                                                                                                     |
| 4.1<br> | <b>Connecting cable RS232 C</b><br>9/9-pin, length 3 m                                                      |
| 4.2<br> | <b>Patch cable CAT 5e</b> , 3 m, grey                                                                       |


| Extras Applicators                                                                          | Product                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.13<br>   | <b>Blow tube</b>                                                                                                                                                                                                                                                                |
| 5.14<br>  | <b>Air pressure regulation unit</b><br>It can be mounted at the Hermes+ or bracket according to angle. Presetting at 4,5 bar.                                                                                                                                                   |
| 5.15<br> | <b>Air pressure regulation unit</b><br>With main valve. In case of integration of the print & apply system into a production line the air-pressure for the applicator may be switched on or off externally. Presetting at 4,5 bar. Essential in combination with E-Stop switch. |
| 5.16<br> | <b>Air pressure regulation unit</b><br>With additional shut-off valve to allow complete ventilation of hose lines behind the air pressure regulation unit for using the air-jet box 6014.                                                                                       |
| 5.17<br> | <b>Compressed air regulator</b><br>To reduce tamp force of stroke applicators.                                                                                                                                                                                                  |

## Accessories - Assembly aids



### Mounting foot

For desktop installation or integration into production lines,  
Available in left or right version. Size of the foot may upon  
request be adapted to the requirements of the application.

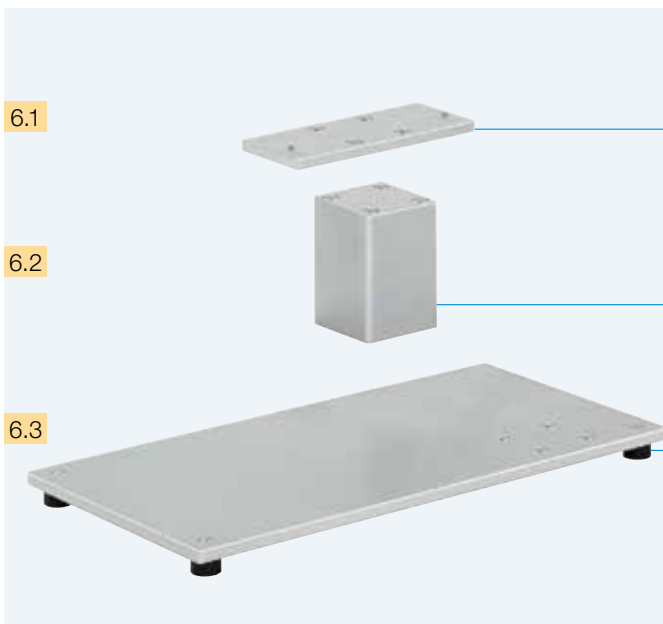

6.1

### 1 Adapter plate

The device is mounted on the adapter plate.  
The printer with adapter plate may also be mounted directly  
at the production line by using the profile.

6.2


### 2 Profile

Standard lengths: 40, 80 and 120 mm. The aluminum  
square profile may also be customized in length according  
to the individual requirements. Other lengths on request.

6.3

### 3 Base plate

For fastening the printer holder  
Standard size: 500 x 255 mm.

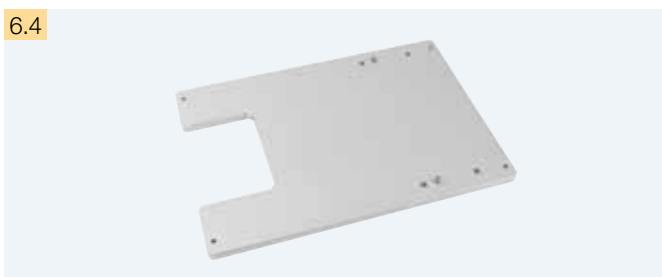

6.4

### Mounting plate

Allows to mount the device directly at the production line.

## Accessories - Mounting aid


6.5



### Bracket

The Hermes+ is mounted at the stand via bracket.


6.6

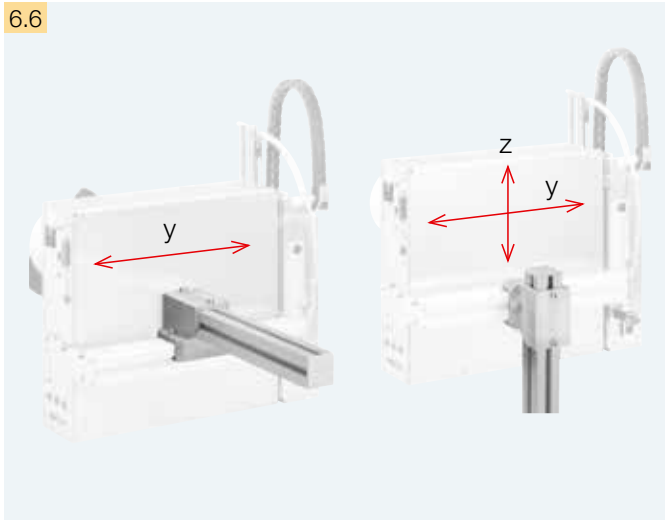

### Clamped joint

Allows the device to be moved in horizontal and optionally vertical direction.

6.7

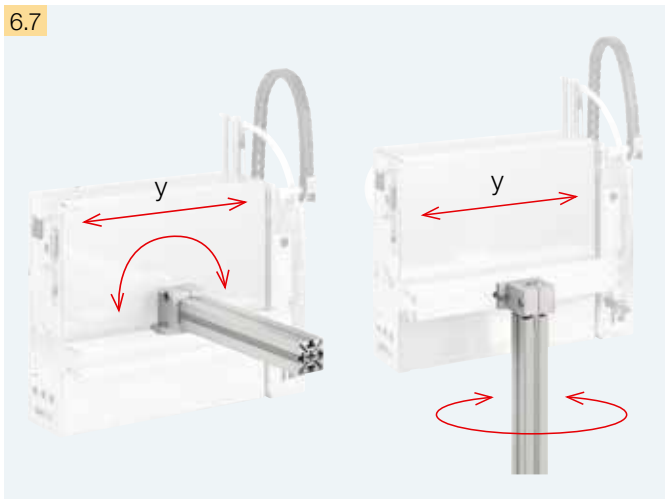


### Flanged joint

Allows the device to be moved in horizontal direction or to be rotated about one axis.

### Using the aluminum profile:

Profile cross-section: 50 x 50 mm  
Supplier profile: Rose+Krieger  
Part No.: 4.08.5000

# Accessories floor stand

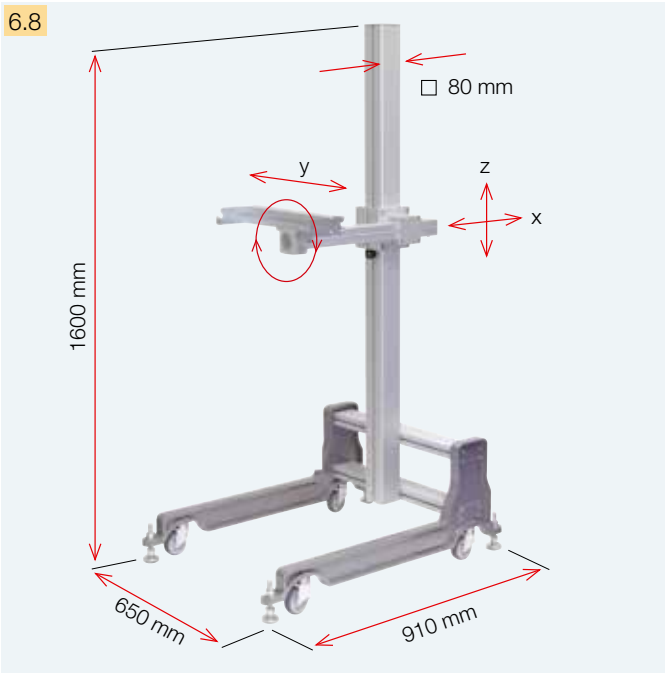

For integrating all types of labeling systems of the Hermes+ series into any manufacturing line. Due to the adjustability the Hermes+ can be positioned in 3 axes to the product to be labeled. Pivoting is also possible.

**Floor stand 1601 Hermes+**  
Preferred for using the Hermes+ at different production lines. The floor stand is mobile and allows to be positioned and locked with adjustable feet at the place of destination.

| Technical data                      | Floor stand 1601 Hermes+          |
|-------------------------------------|-----------------------------------|
| Base frame                          | Guide rollers and adjustable feet |
| Adjustment in height                | Screw clamping                    |
| Adjustment in depth                 | Screw clamping                    |
| Max. load kg at an offset of 500 mm | 50                                |
| Weight kg                           | 36                                |



**Floor stand 1602 Hermes+**  
Preferably used if the labeling position needs to be frequently adjusted in height and depth. Due to the toothed rack adjustment the Hermes+ may be positioned in X and Y direction to the product.


| Technical data                      | Floor stand 1602 Hermes+ |
|-------------------------------------|--------------------------|
| Base frame                          | Adjustable feet          |
| Adjustment in height                | Toothed rack / crank     |
| Adjustment in depth                 | Toothed rack / handwheel |
| Max. load kg at an offset of 500 mm | 50                       |
| Weight kg                           | 38                       |

## Examples printer installation


Labeling in transport direction  
from top




sidewards



Labeling at right angles to transport direction  
from top



sidewards



# Software features of the label printer

## 7.1


J  
H 100  
O R  
S l1:0,0,68,70,100  
T 10, 10,0,5,pt20;sample  
B 10,20,0,EAN-13,SC2,401234512345  
G 8,3,5,0;R:30,9,0,3;0,3  
A 1

**Job Start**  
**Speed (100 mm / s)**  
**Orientation rotated by 180°**  
**Size of label (100x68 mm, gap 2 mm)**  
**Text object/font: Swiss bold, 20 pt**  
**Barcode EAN 13; size SC 2**  
**Graphic, box 30 x 9 mm,**  
**Line weight 0,3 mm**  
**Number of labels (in this example 1)**

## Direct programming with JScript

Every cab printer can be directly programmed with the easy to understand programming language JScript. JScript is described in the programmer's guide (product range 7.10). The label software cablabel® S3 optimally supports the direct programming, but may also be generated with any other text editor.

## 7.2

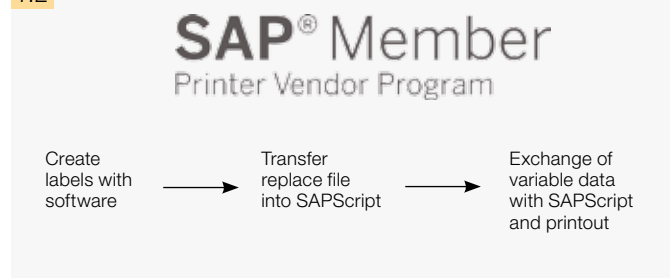

## Replace files and integration in SAP R/3\*

In cooperation with SAP, cab developed the replace method to control cab printers with SAPScript from SAP R/3. As a SAP partner, cab has access to the SAP development area for optimum printer support in SAP environments. With the replace method the host computer only sends data to the device that has to be changed in JScript. cablabel® S3 enables to generate all necessary replace files in combination with the label layout in one software.

*\*SAP and all SAP logos are trademarks or registered trademarks of SAP AG in Germany and in several other countries.*

## 7.3

```

abc - Notepad
File Edit Format View Help
<ABC>
label start
input a$
if left$(a$,15)="194300301480070" then
  print "R t2: ",mid$(a$,16)
endif
if left$(a$,15)="194300300580172" then
  print "R t3: ",mid$(a$,16)
endif
if left$(a$,15)="194300301970073" then
  print "R t1: ",mid$(a$,16)
endif
if a$0"q0001" then
  print "A 1"
endif
goto start
  
```

## abc BASIC Compiler

As an integrated element of the firmware, the Basic Compiler enables the printer to process data via BASIC programming before it is sent for print editing. That way, you replace external printer languages or integrate data from other systems, e.g. balance or a PLC.

With cablabel® S3 you integrate the required program code easily when creating the label.




## 7.4



## Printer monitoring with Intranet and Internet

Using standard programs such as the web browser or FTP clients, the integrated HTTP and FTP server enables print monitoring, configuration, firmware updates and memory card administration. Status, warning and error messages are sent to administrators or users as e-mails or SNMP datagrams via SNMP and SMTP clients. A time server is used to synchronize time and date.

## 7.5

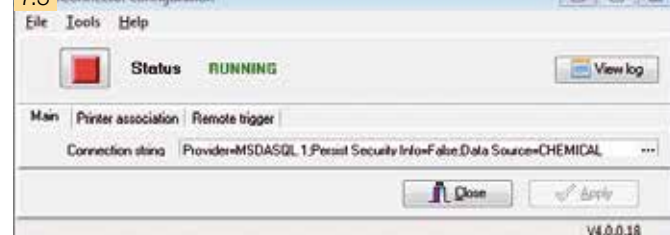


## Database Connector

In the stand-alone mode with additional network connection the Database Connector allows the printer to access data directly from a central ODBC-/OLEDB compatible database and to print it. At the same time, data can also be written back to the database during the printing process.

Integrating the Database Connector into cablabel® S3 allows to conveniently establish this data base connection when designing your layout.

## Software tools – Label software

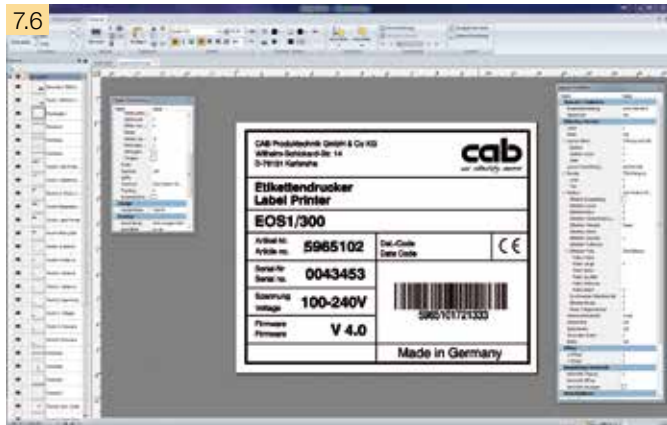

cablabel® S3 is available for the following operating systems in 32- and 64-bit version:

|                             |                     |
|-----------------------------|---------------------|
| Windows XP Professional SP3 | Windows 7 SP1       |
| Windows Server 2003 SP2     | Windows Server 2008 |
| Windows Vista SP2           | Windows 8           |

*Terminalserver / Citrix are not supported.*

cablabel® S3 is a label software that offers the following three functions:

- **Designing**
- **Printing**
- **Monitoring**


cablabel® S3 does open up the full potential of cab devices in the design of your label: An extensive instruction set is available within the intuitive user interface, e.g. different date formats, mathematic or logic functions.

In doing so, cablabel® S3 brings all cab marking systems together: First of all you design the label. You do not decide until printing whether you like the label to be dispensed on a label printer, a print and apply system or a laser marking system.

Do you like your marking system to print independently of a host system in the stand-alone mode? cablabel® S3 supports again: After having designed the label, the software supplies you with all necessary data stored within the printer for stand-alone mode.

cablabel® S3 is of modular design and can be adapted to your requirements step by step: In order to support functions like native programming with JScript, elements like JScript-Viewer are embedded as plug-in. The designer user interface and JScript code are synchronized in real time. Special functions like Database Connector or bar code tester can be easily integrated.


## Software tools – Monitoring

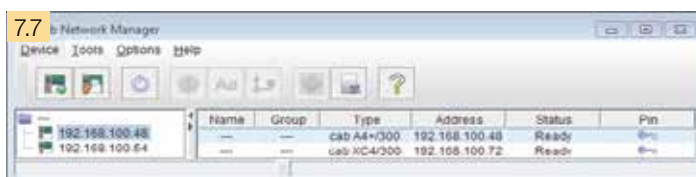

### Administration Network Manager

The cab Network Manager allows the user to simultaneously control a number of printers across a network. It supports from one place monitoring, configuration, firmware updates, memory card administration, file synchronization and PIN administration.

# Printer drivers

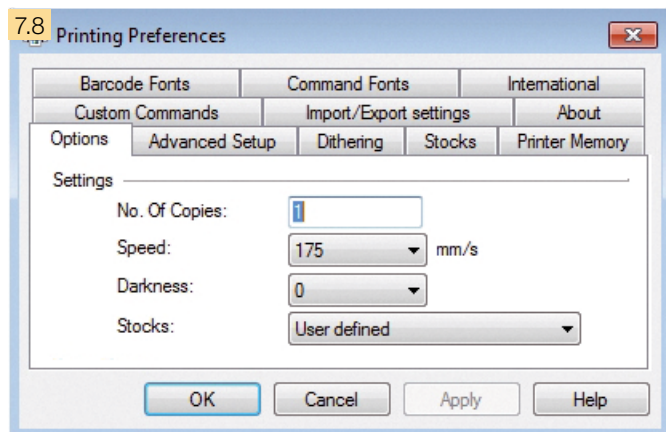


## WHQL certified Windows printer drivers for

|               |                        |
|---------------|------------------------|
| Windows XP    | Windows Server 2003    |
| Windows Vista | Windows Server 2008    |
| Windows 7     | Windows Server 2008 R2 |
| Windows 8     | Windows Server 2012    |
| Windows 8.1   | Windows Server 2012 R2 |

Our printer drivers are officially certified and signed by Microsoft. They ensure optimum stability on your Windows operating system. The drivers are included in the scope of delivery.


*Microsoft® is a registered trademark of Microsoft Corporation.*

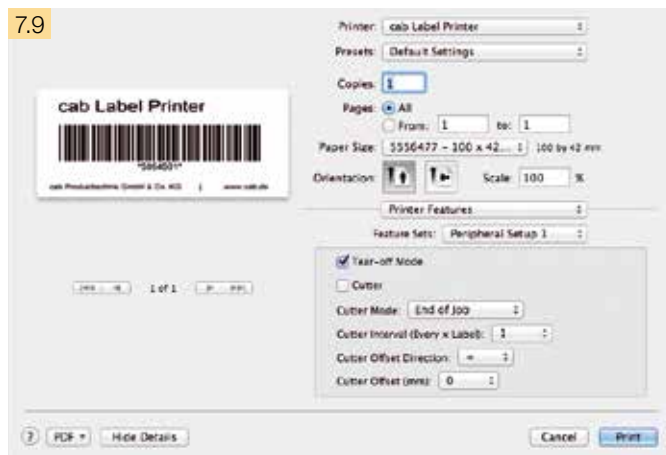

## Apple-Mac OS X® driver

Alternatively, cab offers a CUPS-based printer driver for programs using Mac OS X. The driver is available as a free download on our website [www.cab.de](http://www.cab.de).

*Mac OS® is a registered trademark of Apple Computer, Inc.*

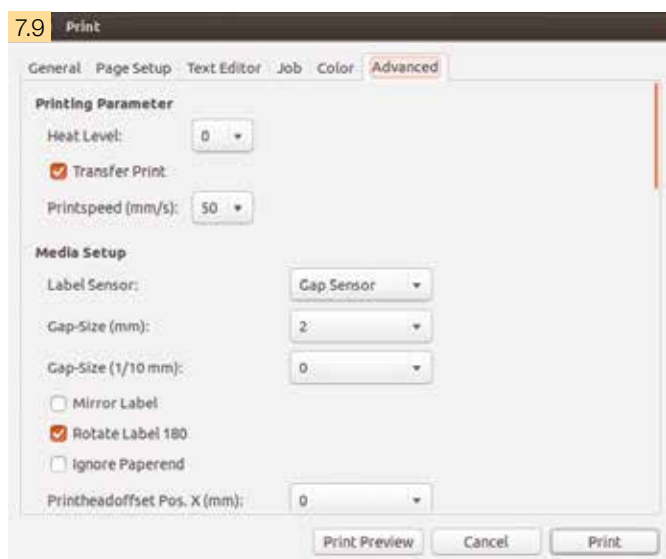

## Linux driver

Alternatively, cab offers a CUPS-based printer driver for programs using Linux. The driver is available as a free download on our website [www.cab.de](http://www.cab.de).

# Delivery program label printer

|                                                                                    | Part No. | Hardware L                                    | Part No.                            | Spare parts | Part No.                            | Spare parts | Part No.                              | Spare parts |
|------------------------------------------------------------------------------------|----------|-----------------------------------------------|-------------------------------------|-------------|-------------------------------------|-------------|---------------------------------------|-------------|
|   | 1.1      | <b>5955502</b> Label printer Hermes+ 2L/300-2 | <b>5954105.001</b> Print head 2/300 |             | <b>5954102.001</b> Print roller DR2 |             | <b>5961015.001</b> Drawing roller ZR2 |             |
|                                                                                    |          | <b>5955503</b> Label printer Hermes+ 2L/600-2 | <b>5958686.001</b> Print head 2/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.2      | <b>5955504</b> Label printer Hermes+ 4L/200-2 | <b>5954081.001</b> Print head 4/200 |             | <b>5954180.001</b> Print roller DR4 |             | <b>5961298.001</b> Drawing roller ZR4 |             |
|                                                                                    |          | <b>5955505</b> Label printer Hermes+ 4L/300-2 | <b>5954072.001</b> Print head 4/300 |             |                                     |             |                                       |             |
|                                                                                    |          | <b>5955506</b> Label printer Hermes+ 4L/600-2 | <b>5954077.001</b> Print head 4/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.3      | <b>5955509</b> Label printer Hermes+ 6L/200-2 | <b>5954217.001</b> Print head 6/200 |             | <b>5954245.001</b> Print roller DR6 |             | <b>5961220.001</b> Drawing roller ZR6 |             |
|   | 1.1      | <b>5961410</b> Label printer Hermes+ 2L/300-3 | <b>5954105.001</b> Print head 2/300 |             | <b>5954102.001</b> Print roller DR2 |             | <b>5961015.001</b> Drawing roller ZR2 |             |
|                                                                                    |          | <b>5961411</b> Label printer Hermes+ 2L/600-3 | <b>5958686.001</b> Print head 2/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.2      | <b>5955511</b> Label printer Hermes+ 4L/200-3 | <b>5954081.001</b> Print head 4/200 |             | <b>5954180.001</b> Print roller DR4 |             | <b>5961298.001</b> Drawing roller ZR4 |             |
|                                                                                    |          | <b>5955512</b> Label printer Hermes+ 4L/300-3 | <b>5954072.001</b> Print head 4/300 |             |                                     |             |                                       |             |
|                                                                                    |          | <b>5955513</b> Label printer Hermes+ 4L/600-3 | <b>5954077.001</b> Print head 4/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.3      | <b>5955516</b> Label printer Hermes+ 6L/200-3 | <b>5954217.001</b> Print head 6/200 |             | <b>5954245.001</b> Print roller DR6 |             | <b>5961220.001</b> Drawing roller ZR6 |             |
|   | 1.1      | <b>5955752</b> Label printer Hermes+ 2R/300-2 | <b>5954105.001</b> Print head 2/300 |             | <b>5954102.001</b> Print roller DR2 |             | <b>5961015.001</b> Drawing roller ZR2 |             |
|                                                                                    |          | <b>5955753</b> Label printer Hermes+ 2R/600-2 | <b>5958686.001</b> Print head 2/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.2      | <b>5955754</b> Label printer Hermes+ 4R/200-2 | <b>5954081.001</b> Print head 4/200 |             | <b>5954180.001</b> Print roller DR4 |             | <b>5961298.001</b> Drawing roller ZR4 |             |
|                                                                                    |          | <b>5955755</b> Label printer Hermes+ 4R/300-2 | <b>5954072.001</b> Print head 4/300 |             |                                     |             |                                       |             |
|                                                                                    |          | <b>5955756</b> Label printer Hermes+ 4R/600-2 | <b>5954077.001</b> Print head 4/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.3      | <b>5955759</b> Label printer Hermes+ 6R/200-2 | <b>5954217.001</b> Print head 6/200 |             | <b>5954245.001</b> Print roller DR6 |             | <b>5961220.001</b> Drawing roller ZR6 |             |
|  | 1.1      | <b>5961412</b> Label printer Hermes+ 2R/300-3 | <b>5954105.001</b> Print head 2/300 |             | <b>5954102.001</b> Print roller DR2 |             | <b>5961015.001</b> Drawing roller ZR2 |             |
|                                                                                    |          | <b>5961413</b> Label printer Hermes+ 2R/600-3 | <b>5958686.001</b> Print head 2/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.2      | <b>5955761</b> Label printer Hermes+ 4R/200-3 | <b>5954081.001</b> Print head 4/200 |             | <b>5954180.001</b> Print roller DR4 |             | <b>5961298.001</b> Drawing roller ZR4 |             |
|                                                                                    |          | <b>5955762</b> Label printer Hermes+ 4R/300-3 | <b>5954072.001</b> Print head 4/300 |             |                                     |             |                                       |             |
|                                                                                    |          | <b>5955763</b> Label printer Hermes+ 4R/600-3 | <b>5954077.001</b> Print head 4/600 |             |                                     |             |                                       |             |
|                                                                                    | 1.3      | <b>5955766</b> Label printer Hermes+ 6R/200-3 | <b>5954217.001</b> Print head 6/200 |             | <b>5954245.001</b> Print roller DR6 |             | <b>5961220.001</b> Drawing roller ZR6 |             |
|                                                                                    |          | <b>5955767</b> Label printer Hermes+ 6R/300-3 | <b>5956322.001</b> Print head 6/300 |             |                                     |             |                                       |             |

| Part No.           | Hardware options                                                                              |
|--------------------|-----------------------------------------------------------------------------------------------|
| <b>595xxxx.201</b> | Label printer Hermes+ with cover <sup>1)</sup>                                                |
| <b>595xxxx.202</b> | Label printer Hermes+ with ribbon saver <sup>2)</sup>                                         |
| <b>595xxxx.203</b> | Label printer Hermes+ with cover <sup>1)</sup> and ribbon saver <sup>2)</sup>                 |
| <b>on request</b>  | Label printer Hermes+ with label roll core diameter of 40 mm only for Hermes+2 and 4          |
| <b>5961406</b>     | adapter for core diameter 50 mm                                                               |
|                    | <sup>1)</sup> only for label rolls up to 205 mm Ø                                             |
|                    | <sup>2)</sup> only for Hermes+4 and 6                                                         |
|                    | If the immersion depth of the applicator >25 mm, the cover of the Hermes+ has to be modified. |

| Content of delivery:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Label printer,<br>Power cable Type E+F, length 1,8 m,<br>Connecting cable USB, length 1,8 m,<br>Operation manual de/en                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>DVD:</b> Operation manual de/en/fr,<br>Configuration manual de/en/fr,<br>Service manual de/en,<br>Spare part list de/en,<br>Programmer's guide en,<br>Windows printer driver 32/64 bit in 19 languages for<br>Windows XP Server 2003<br>Windows Vista Server 2008<br>Windows 7 Server 2008 R2<br>Windows 8 Server 2012<br>Windows 8.1 Server 2012 R2<br>Label software cablabel® S3 Lite<br>Label software cablabel® S3 Viewer<br>For current data please surf to <a href="http://www.cab.de">www.cab.de</a> |

| Type code               |                               |                   |
|-------------------------|-------------------------------|-------------------|
| Label printer           | Hermes <sup>+</sup>           | 4L/200-2          |
| Label width             | 58 mm<br>114 mm<br>174 mm     | 2<br>4<br>6       |
| Dispensing to the       | left<br>right                 | L<br>R            |
| Print resolution        | 203 dpi<br>300 dpi<br>600 dpi | 200<br>300<br>600 |
| for print rolls Ø up to | 205 mm                        | 2                 |
| for print rolls Ø up to | 305 mm                        | 3                 |

# Delivery program applicators and transfer modules

|      |                                                                                     | Part No.                                                                                                 | Applicators L                                                                                                                                                                                                  |  | Part No.                                                                                                                    | Transfer modules                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.1  |    | <b>5970075</b>                                                                                           | Swing applicator 3214L-40                                                                                                                                                                                      |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                                                                                    | Tamp pad 3214L-11 F B x H<br>Tamp pad with damping pad 3214L-12 F B x H<br>Tamp pad with label stop 3214L-61 F B x H<br>Blow pad 3214L-2100 B x H                                                                                                                                                                                                                                                                                                                     |
| 5.2  |    | <b>5966109</b><br><b>5966110</b><br><b>5966111</b>                                                       | Stroke applicator 4114L-200<br>Stroke applicator 4114L-300<br>Stroke applicator 4114L-400                                                                                                                      |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                                                                         | Tamp pad 4114L-11 F B x H<br>Tamp pad with damping pad 4114L-12 F B x H<br>Tamp pad with label stop 4114L-61 F B x H<br>Blow pad 4114L-2100 B x H<br>Silicon pad 4114L-8800 B x H                                                                                                                                                                                                                                                                                     |
| 5.3  |    | <b>5966117</b><br><b>5966118</b><br><b>5966119</b>                                                       | Stroke-turn applicator 4214L-200<br>Stroke-turn applicator 4214L-300<br>Stroke-turn applicator 4214L-400                                                                                                       |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                                                                                    | Tamp pad 4214L-11 F B x H<br>Tamp pad with damping pad 4214L-12 F B x H<br>Tamp pad with label stop 4214L-61 F B x H<br>Blow pad 4214L-2100 B x H                                                                                                                                                                                                                                                                                                                     |
| 5.4  |    | <b>5966133</b><br><b>5966134</b><br><b>5966135</b>                                                       | Stroke applicator 4414L-200<br>Stroke applicator 4414L-300<br>Stroke applicator 4414L-400                                                                                                                      |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx                                                                                               | Tamp pad 4414L-11 F B x H<br>Tamp pad with damping pad 4414L-12 F B x H<br>Tamp pad with label stop 4414L-61 F B x H                                                                                                                                                                                                                                                                                                                                                  |
| 5.5  |    | <b>5971625</b><br><b>5966168</b><br><b>5971640</b>                                                       | Swing-stroke applicator 4514L-200<br>Swing-stroke applicator 4514L-300<br>Swing-stroke applicator 4514L-400                                                                                                    |  | xxxxxxx                                                                                                                     | Blow pad 4514L-2100 B x H                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 5.6  |   | <b>597xxxx</b>                                                                                           | Flag applicator 4714L-300                                                                                                                                                                                      |  |                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5.7  |  | <b>5970100</b><br><b>5970101</b><br><b>5970102</b><br><b>5970103</b><br><b>5970104</b><br><b>5970105</b> | Front-side applicator 3014L-200<br>Front-side applicator 3014L-300<br>Front-side applicator 3014L-400<br>Front-side applicator 3016L-200<br>Front-side applicator 3016L-300<br>Front-side applicator 3016L-400 |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                                                                         | Tamp pad 3014L -1100 B x H<br>Spring-mounted tamp pad 3014L -3100 B x H<br>Blow pad 3014L -2100 B x H<br>Tamp pad 3016L -1100 B x H<br>Spring-mounted tamp pad 3016L -3100 B x H                                                                                                                                                                                                                                                                                      |
| 5.8  |  | <b>5966101</b><br><b>5966102</b><br><b>5966103</b><br><b>5966161</b><br><b>5966162</b><br><b>5966163</b> | Stroke applicator 4014L-200<br>Stroke applicator 4014L-300<br>Stroke applicator 4014L-400<br>Stroke applicator 4016L-200<br>Stroke applicator 4016L-300<br>Stroke applicator 4016L-400                         |  | <b>5966147</b><br><b>5966148</b><br><b>5966149</b><br><b>5966150</b><br>xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx | Universal pad 4014L-1100 75 x 60<br>Universal pad 4014L-1100 90 x 90<br>Spring-mounted universal pad 4014L-3100 116 x 102<br>Spring-mounted universal pad 4014L-3100 116 x 152<br>Tamp pad 4014L-11 F B x H<br>Blow pad 4014L-2100 B x H<br>Spring-mounted tamp pad 4014L-3100 B x H<br>Roll-on pad 4014L-4100 B x H<br>Corner-wrap pad 4014L-5100 B x H / H<br>Tamp pad 4016L-11 F B x H<br>Spring-mounted tamp pad 4016L-3100 B x H<br>Roll-on pad 4016L-4100 B x H |
| 5.9  |  | <b>5971720</b><br><b>5971725</b><br><b>5971730</b>                                                       | Stroke-blow applicator 4614L-200<br>Stroke-blow applicator 4614L-300<br>Stroke-blow applicator 4614L-400                                                                                                       |  | xxxxxxx                                                                                                                     | Blow pad with height sensor 4614L-2100 B x H                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5.10 |  | <b>5966144</b>                                                                                           | Demand module 5114L                                                                                                                                                                                            |  |                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5.11 |  | <b>5971650</b><br><b>5971680</b>                                                                         | Vacuum-belt applicator 5314L<br>Vacuum-belt applicator 5316L                                                                                                                                                   |  |                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5.12 |  | <b>5971581</b>                                                                                           | Air-jet-box 6014L                                                                                                                                                                                              |  | <b>5971581</b><br>xxxxxxx                                                                                                   | Blow module 6014 L/R universal<br>Blow module 6014L B x H configured                                                                                                                                                                                                                                                                                                                                                                                                  |

# Delivery program applicators and transfer modules

|      |                                                                                     | Part No.                                           | Applicators R                                                                                               |  | Part No.                                                             | Transfer modules                                                                                                                                                                        |
|------|-------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.1  |    | <b>5971655</b>                                     | Swing applicator 3214R-40                                                                                   |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                             | Tamp pad 3214R-11 F B x H<br>Tamp pad with damping pad 3214R-12 F B x H<br>Tamp pad with label stop 3214R-61 F B x H<br>Blow pad 3214R-2100 B x H                                       |
| 5.2  |    | <b>5966105</b><br><b>5966106</b><br><b>5966107</b> | Stroke applicator 4114R-200<br>Stroke applicator 4114R-300<br>Stroke applicator 4114L-400                   |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                  | Tamp pad 4114R-11 F B x H<br>Tamp pad with damping pad 4114R-12 F B x H<br>Tamp pad with label stop 4114R-61 F B x H<br>Blow pad 4114R-2100 B x H<br>Silicone form pad 4114R-8800 B x H |
| 5.3  |    | <b>5966121</b><br><b>5966122</b><br><b>5966123</b> | Stroke-turn applicator 4214R-200<br>Stroke-turn applicator 4214R-300<br>Stroke-turn applicator 4214R-400    |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                             | Tamp pad 4214R-11 F B x H<br>Tamp pad with damping pad 4214R-12 F B x H<br>Tamp pad with label stop 4214R-61 F B x H<br>Blow pad 4214R-2100 B x H                                       |
| 5.4  |    | <b>5966137</b><br><b>5966138</b><br><b>5966139</b> | Stroke applicator 4414R-200<br>Stroke applicator 4414R-300<br>Stroke applicator 4414R-400                   |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx                                        | Tamp pad 4414R-11 F B x H<br>Tamp pad with damping pad 4414R-12 F B x H<br>Tamp pad with label stop 4414R-61 F B x H                                                                    |
| 5.5  |    | <b>5966950</b><br><b>5971460</b><br><b>5971700</b> | Swing-stroke applicator 4514R-200<br>Swing-stroke applicator 4514R-300<br>Swing-stroke applicator 4514R-400 |  | xxxxxxx                                                              | Blow pad 4514R-2100 B x H                                                                                                                                                               |
| 5.6  |   | <b>597xxxx</b>                                     | Flag applicator 4714R-300                                                                                   |  |                                                                      |                                                                                                                                                                                         |
| 5.7  |  | <b>5970106</b><br><b>5970107</b><br><b>5970108</b> | Front-side applicator 3014R-200<br>Front-side applicator 3014R-300<br>Front-side applicator 3014R-400       |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx                                        | Tamp pad 3014R -1100 B x H<br>Spring-mounted tamp pad 3014R -3100 B x H<br>Blow pad 3014R -2100 B x H                                                                                   |
|      |                                                                                     | <b>5970109</b><br><b>5970110</b><br><b>5970111</b> | Front-side applicator 3016R-200<br>Front-side applicator 3016R-300<br>Front-side applicator 3016R-400       |  | xxxxxxx<br>xxxxxxx                                                   | Tamp pad 3016R -1100 B x H<br>Spring-mounted tamp pad 3016R -3100 B x H                                                                                                                 |
| 5.8  |  |                                                    |                                                                                                             |  | <b>5966140</b><br><b>5966141</b><br><b>5966142</b><br><b>5966143</b> | Universal pad 4014R-1100 75 x 60<br>Universal pad 4014R-1100 90 x 90<br>Spring-mounted universal pad 4014R-3100 116 x 102<br>Spring-mounted universal pad 4014R-3100 116 x 152          |
|      |                                                                                     | <b>5966105</b><br><b>5966106</b><br><b>5966107</b> | Stroke applicator 4014R-200<br>Stroke applicator 4014R-300<br>Stroke applicator 4014R-400                   |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx<br>xxxxxxx                  | Tamp pad 4014R-11 F B x H<br>Blow pad 4014R-2100 B x H<br>Spring-mounted tamp pad 4014R-3100 B x H<br>Roll-on pad 4014R-4100 B x H<br>Corner-wrap pad 4014R-5100 B x H / H              |
|      |                                                                                     | <b>5966165</b><br><b>5966166</b><br><b>5966167</b> | Stroke applicator 4016R-200<br>Stroke applicator 4016R-300<br>Stroke applicator 4016R-400                   |  | xxxxxxx<br>xxxxxxx<br>xxxxxxx                                        | Tamp pad 4016R-11 F B x H<br>Spring-mounted tamp pad 4016R-3100 B x H<br>Roll-on pad 4016R-4100 B x H                                                                                   |
| 5.9  |  | <b>5971735</b><br><b>5971740</b><br><b>5971745</b> | Stroke-blow applicator 4614R-200<br>Stroke-blow applicator 4614R-300<br>Stroke-blow applicator 4614R-400    |  | xxxxxxx                                                              | Blow pad with height sensor 4614R-2100 B x H                                                                                                                                            |
| 5.10 |  | <b>5966145</b>                                     | Demand module 5114R                                                                                         |  |                                                                      |                                                                                                                                                                                         |
| 5.11 |  | <b>5971670</b>                                     | Vacuum-belt applicator 5314R                                                                                |  |                                                                      |                                                                                                                                                                                         |
|      |                                                                                     | <b>5971690</b>                                     | Vacuum-belt applicator 5316R                                                                                |  |                                                                      |                                                                                                                                                                                         |
| 5.12 |  | <b>5971577</b>                                     | Air-jet-box 6014R                                                                                           |  | <b>5971581</b><br>xxxxxxx                                            | Blow module 6014 L/R universal<br>Blow module 6014R B x H configured                                                                                                                    |

# Delivery program accessories

|      |                                                                                     | Part No.                                                      | Extras Hermes <sup>+</sup>                                             |                                                                                     |
|------|-------------------------------------------------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2.1  |    | <b>961000.001</b><br><b>5961070.001</b><br><b>5961193.001</b> | Cover 2L<br>Cover 4L<br>Cover 6L                                       | If the immersion depth of the applicator exceeds 25mm the cover has to be modified. |
|      |    | <b>961190.001</b><br><b>5961187.001</b><br><b>5961196.001</b> | Cover 2R<br>Cover 4R<br>Cover 6R                                       |                                                                                     |
| 2.2  |    | <b>5954380.001</b>                                            | External operation panel                                               |                                                                                     |
| 2.3  |    | <b>5901630</b>                                                | Standard keyboard USB German version                                   |                                                                                     |
| 2.4  |    | <b>5561043</b>                                                | Memory card CompactFlash Typ I                                         |                                                                                     |
| 2.5  |    | <b>5964300</b>                                                | Product sensor to start 25 pin Connection Hermes <sup>+</sup>          |                                                                                     |
| 2.6  |    | <b>5964300</b>                                                | Product sensor to start 3 pin Connection Air-jet-box                   |                                                                                     |
| 2.7  |    | <b>5917651</b>                                                | I/O-Interface connector SUB-D-plug 25 pole Phoenix Contact No. 2761622 |                                                                                     |
| 2.8  |    | <b>5961237.001</b>                                            | Warning light                                                          |                                                                                     |
| 2.9  |    | <b>5918092</b>                                                | Circular connector 3-pin M8                                            |                                                                                     |
|      |  | <b>5918003</b>                                                | Circular connector 4-pin M8                                            |                                                                                     |
|      |                                                                                     | <b>Part No.</b>                                               | <b>Interfaces</b>                                                      |                                                                                     |
| 3.1  |  | <b>5954200</b>                                                | Centronics interface                                                   |                                                                                     |
| 3.2  |                                                                                     | <b>5954201</b>                                                | RS422/RS485 interface                                                  |                                                                                     |
| 3.3  |  | <b>5954191</b>                                                | Label selection - I/O-Box                                              |                                                                                     |
|      |                                                                                     | <b>Part No.</b>                                               | <b>Connecting cable</b>                                                |                                                                                     |
| 4.1  |  | <b>5550818</b>                                                | Connecting cable RS232 C 9/9-pin, length 3 m                           |                                                                                     |
| 4.2  |  | <b>5918008</b>                                                | Patch cable KAT 5e, 3 m grey                                           |                                                                                     |
|      |                                                                                     | <b>Part No.</b>                                               | <b>Extras Applicators</b>                                              |                                                                                     |
| 5.13 |  | <b>5964277.001</b>                                            | Blow tube 2"                                                           |                                                                                     |
|      |                                                                                     | <b>5964095.001</b>                                            | Blow tube 4"                                                           |                                                                                     |
|      |                                                                                     | <b>5964614.001</b>                                            | Blow tube 6"                                                           |                                                                                     |
| 5.14 |  | <b>5955735</b>                                                | Air pressure regulation unit L                                         |                                                                                     |
|      |  | <b>5955736</b>                                                | Air pressure regulation unit R                                         |                                                                                     |
| 5.15 |  | <b>5955737</b>                                                | Air pressure regulation unit L with main valve                         |                                                                                     |
|      |  | <b>5955738</b>                                                | Air pressure regulation unit R with main valve                         |                                                                                     |

|                |                                                                                      | Part No.                  | Extras Applicators                                                                                                                                                                                                |
|----------------|--------------------------------------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.16           |     | <b>5971556</b>            | Air pressure regulation unit L with shut-off valve                                                                                                                                                                |
|                |     | <b>5971559</b>            | Air pressure regulation unit R with shut-off valve                                                                                                                                                                |
| 5.17           |                                                                                      | <b>596xxxx.212</b>        | Compressed air regulator valve to reduce tamp force                                                                                                                                                               |
|                |                                                                                      | Part No.                  | Mounting aid                                                                                                                                                                                                      |
| 6.1            |     | <b>5965940</b>            | Adapter plate                                                                                                                                                                                                     |
| 6.2            |     | on request                | Profile                                                                                                                                                                                                           |
| 6.3            |    | <b>5961203</b>            | Base plate 500 x 255 mm                                                                                                                                                                                           |
| 6.4            |    | <b>5958400</b>            | Mounting plate                                                                                                                                                                                                    |
| 6.5            |    | <b>5955685</b>            | Bracket profile 50 x 50 mm<br>Supplier: Rose+Krieger<br>Part No. 4.08.5000                                                                                                                                        |
| 6.6            |    | <b>8914443</b>            | Clamped joint profile 50 x 50 mm<br>Supplier: Rose+Krieger<br>Part No. 4.08.5000                                                                                                                                  |
| 6.7            |   | <b>8914444</b>            | Flanged joint profile 50 x 50 mm<br>Supplier: Rose+Krieger<br>Part No. 4.08.5000                                                                                                                                  |
| 6.8            |   | <b>5970113</b>            | Stand 1601                                                                                                                                                                                                        |
| 6.9            |   | <b>5970112</b>            | Stand 1602                                                                                                                                                                                                        |
|                |                                                                                      | Part No.                  | Software                                                                                                                                                                                                          |
| 7.6            |  | <b>5588000</b>            | Label software<br>cablabel® S3 Lite                                                                                                                                                                               |
|                |                                                                                      | <b>5588001</b>            | cablabel® S3 Pro 1 WS<br>cablabel® S3 Pro 5 WS<br>cablabel® S3 Pro 10 WS<br>cablabel® S3 Pro 1 additional licence<br>cablabel® S3 Pro 4 additional licences<br>cablabel® S3 Pro 9 additional licences             |
|                |                                                                                      | <b>5588100</b>            |                                                                                                                                                                                                                   |
|                |                                                                                      | <b>5588101</b>            |                                                                                                                                                                                                                   |
|                |                                                                                      | <b>5588150</b>            |                                                                                                                                                                                                                   |
|                |                                                                                      | <b>5588151</b>            |                                                                                                                                                                                                                   |
|                |                                                                                      | <b>5588152</b>            | cablabel® S3 Print 1 WS<br>cablabel® S3 Print 5 WS<br>cablabel® S3 Print 10 WS<br>cablabel® S3 Print 1 additional licence<br>cablabel® S3 Print 4 additional licences<br>cablabel® S3 Print 9 additional licences |
|                |                                                                                      | <b>5588002</b>            |                                                                                                                                                                                                                   |
|                |                                                                                      | <b>5588105</b>            |                                                                                                                                                                                                                   |
|                |                                                                                      | <b>5588106</b>            |                                                                                                                                                                                                                   |
| <b>5588155</b> |                                                                                      |                           |                                                                                                                                                                                                                   |
| <b>5588156</b> | cablabel® S3 Print Server                                                            |                           |                                                                                                                                                                                                                   |
| <b>5588157</b> |                                                                                      |                           |                                                                                                                                                                                                                   |
|                |                                                                                      | from the 4th quarter 2015 |                                                                                                                                                                                                                   |
| 7.10           |                                                                                      | <b>9008486</b>            | Programmer's guide English, printed copy                                                                                                                                                                          |



# cab delivery program

## Label printer EOS1

The compact one for label rolls up to 155 mm diameter



## Label printer EOS4

The cost-effective one for label rolls up to 210 mm diameter



## Label printer EOS mobile

Both EOS sizes with battery pack for mobile print



## Label printers A+ series

The universal ones



## Label printer A4+M

With centered material positioning



## Label printer A4+T

With centered material positioning also for textile materials



## Label printer XD4T

Double-sided printing



## Label printers XC series

Two-color printing



## Label dispensers HS/VS

Precise horizontal or vertical dispensing up to 180 mm width



## Print & apply system Hermes+

For automation



## Print & apply system Hermes C

For two-color printing and applying



## Print modules PX series

For integration into automatic labeling systems



## Consumables

Precise printing with cab labels and ribbons



## Label software cablabel S3

Standard and optional



## Laser marking system FL+ series

Precise and fast



## Laser safety housing

The industrial solution



① Headquarter and fabrication  
in Germany

② to ⑦ International  
subsidiaries

There are furthermore 820  
distribution partners in more  
than 80 countries.



#### Germany

cab Produkttechnik  
GmbH & Co KG  
Wilhelm-Schickard-Str. 14  
76131 Karlsruhe  
phone +49 721 6626 0  
fax +49 721 6626 129  
[info@cab.de](mailto:info@cab.de)  
[www.cab.de](http://www.cab.de)

cab Produkttechnik  
Sömmerda GmbH  
Am Unterwege 18-20  
99610 Sömmerda  
phone +49 3634 6860 0  
fax +49 3634 6860 129  
[info@cab.de](mailto:info@cab.de)  
[www.cab.de](http://www.cab.de)

#### France

cab Technologies S.à.r.l.  
2a Rue de la Moder  
Z.A. Nord du Val de Moder  
67350 Niedermodern  
phone +33 388 722501  
fax +33 388 722502  
[info.fr@cab.de](mailto:info.fr@cab.de)  
[www.cab.de/fr](http://www.cab.de/fr)

#### USA

cab Technology, Inc.  
87 Progress Avenue Unit 1  
Tyngsboro, MA 01879  
phone +1 978 649 0293  
fax +1 978 649 0294  
[info.us@cab.de](mailto:info.us@cab.de)  
[www.cab.de/us](http://www.cab.de/us)

#### Latin America

Alejandro Balmaceda  
Hacienda Jurica Pte 1615  
Colonial de Valle  
32553 Ciudad Juárez  
phone +52 656 682 3745  
fax +52 656 682 4301  
[a.balmaceda@cab.de](mailto:a.balmaceda@cab.de)  
[www.cab.de/es](http://www.cab.de/es)

#### South Africa

cab Technology (Pty) Ltd.  
14 Republic Street  
Bordeaux  
2125 Randburg  
phone +27 11 886 3580  
fax +27 11 789 3913  
[info.za@cab.de](mailto:info.za@cab.de)  
[www.cab.de/za](http://www.cab.de/za)

#### Taiwan

cab Technology Co., Ltd.  
希愛比科技股份有限公司  
16F-1, No. 700, Jhong Jheng Rd  
Junghe, Taipei 23552  
phone +886 (02) 8227 3966  
fax +886 (02) 8227 3566  
[info.asia@cab.de](mailto:info.asia@cab.de)  
[www.cab.de/tw](http://www.cab.de/tw)

#### China

cab (Shanghai) Trading Co., Ltd  
铠博(上海)贸易有限公司  
A507, No. 268, Tong Xie Rd  
Shanghai 200335  
phone +86 (021) 6236 3161  
fax +86 (021) 6236 3162  
[info.cn@cab.de](mailto:info.cn@cab.de)  
[www.cab.de/cn](http://www.cab.de/cn)